



三十年专注实心胎
我们一直在努力...

www.kobura.com.cn



总公司

江苏巨能橡塑科技有限公司(中外合资)
JIANGSU GIANTPOWER RUBBER & PLASTIC
TECHNOLOGY CO., LTD.

TEL:0515-88400001

FAX:0515-88400002

ADD:江苏省盐城市盐都区潘黄街道仰徐工业
园经二路2号(E)

分公司

昆山科博拉贸易有限公司
KUNSHAN KOBRA TRADING CO. LTD

TEL:0512-57020878

FAX:0512-57020778

ADD:江苏省昆山市东环路105号

Email:sales@kobura.com.cn





Company introduction 公司简介

科博拉 (KOBURA) 实心轮胎,是江苏巨能(中外合资)有限公司下的高端轮胎品牌。依托江苏盐城盐都产业基地为公司发展的重要载体,拥有全球先进的生产和测试设备,引进具有三十余年研发和生产工艺的台湾知名实心胎生产企业---捷泰橡胶工业股份有限公司轮胎制造技术和工厂管理经验,取得多项新型实用专利和ISO9001:2008等一系列认证。

目前我司生产的各类工程用实心轮胎广泛用于堆高机、高空作业车、滑移装载机、支架搬运设备、装载机等机型,也成为全世界多家工程机械生产工厂(如日本丰田、韩国斗山、美国山猫、台湾台励福、徐工、柳工等国际知名企业)指定配套轮胎,有着丰富的配套服务经验。

本着“科技兴业,质量至上,博益建进,携手辉煌”的宗旨,江苏巨能诚心制作每一条轮胎,诚信服务每一位客户,并愿与广大国内外客户真诚合作,携手共赢,打造更高性价比的实心轮胎而永不止步!

KOBURA solid tire is a leading sub-brand of "Jiangsu Juneng Rubber Technology Co. Ltd.", which is a joint venture with foreign company. The company, with Jiangsu province Yancheng city, Yandu district as its base, owns advanced manufacturing equipment and inspecting facilities. After introducing the top technology and experience of production management from "Zeetah Rubber Ind. Co., Ltd.", who has more than 30 years experiences in solid rubber tires, KOBURA now owns a series of innovation patents and the certificates of ISO9001.

KOBURA solid tires are widely used in such vehicles as forklifts, telehandlers, skid steer loaders, compact wheel loaders, material handlers... KOBURA has always been the supplier for such well-known companies as TOYOTA, Doosan, Bobcat, Tailift, XCMG, LIUGONG, owning rich experience in supporting services.

"Prospering the company through science and technology, Quality and Service first, and Non-Stop innovation" are our principles. We guarantee that each KOBURA solid tire is made through the strict quality control, and we will serve our customers with honesty. We wish to cooperate with customers both at home and abroad, and we are always on the way to produce more cost-effective solid tires.



三十年专注实心胎
我们一直在努力...

Our quality earn your trust!

FORKLIFT SOLID TIRE

叉车实心胎

PATTERN 608

采用低发热、高弹性胎面胶、增强型基部胶、独特的缓冲孔设计。此外，经过长时间的低温硫化过程，我们能够确保每一条轮胎生产都符合客户的期望以及质量的要求。

With application-driven designs and product features including low heat elastic tread rubber, Enhanced friction fabric-blended base rubber, and unique cushion aperture allocation. In addition, via the long-time and low-temperature curing process, we are able to make sure each tyre produced matching customer's expectation as well as quality consistency.



KOBURA

SIZE	RIM	O.D.	S.W.	WEIGHT	CAPACITY
		m/m	m/m	KG	25 Km/H
15x4 1/2-8	3.00	375	110	9	850
16x6-8	4.33	405	145	15	1150
5.00-8	3.00	445	120	15	1150
18x7-8	4.33	445	155	20	1800
6.00-9	4.00	520	145	25.5	1600
21x8-9	6.00	515	180	31	2400
140/55-9	4.00	375	130	10	1000
17 3/4x61/2-10	5.00	450	165	18.6	1500
180/60-10	5.00	450	165	18.6	1500
200/50-10	6.50	460	195	23.5	1900
6.50-10	5.00	560	155	31.5	2000
23x9-10	6.50	565	200	43	3000
7.00-12	5.00	640	165	43	2500
23x10-12	8.00	570	235	46.5	3000
27x10-12	8.00	665	235	70	3500
5.50-15	4.50	665	145	32.5	1900
6.00-15	4.50	685	145	41	2200
7.00-15	5.50/6.00	720	175	57.5	3000
7.50-15	5.50/6.00	745	190	68	3400
8.15-15	7.00	680	210	54	3000
250-15	7.00/7.50	710	225	68.5	3800
22 1/4x7 1/2-15	5.50	565	190	27.6	2400
8.25-15	6.50	800	200	82	4200
300-15	8.00	800	250	101	5000
28x12.5-15	9.75	700	290	85	4800
355/65-15	9.75	810	290	124	6200
7.50-16	6.00	770	185	68	3400
8.25-20	6.00/6.50	980	220	126	5000
9.00-20	7.00	980	220	126	5000
11.00-20	7.00/7.50/8.00	1040	250	170	6500
10.00-20	7.00/7.50/8.00	1010	250	159	6000
12.00-20	7.50/8.00/8.50	1090	265	207	7000
12.00-24	8.00/8.50	1200	300	268	7800
14.00-24	10.00	1330	350	413	10500
14.00-25	10.00	1330	350	408	10500

注:以上所有轮胎适用工程车车辆使用。



608Click



608环保



三十年专注实心胎
我们一直在努力...

Your best solution!

FORKLIFT SOLID TIRE

叉车实心胎

PATTERN 601



KOBURA

SIZE	RIM	O.D.	S.W.	WEIGHT	CAPACITY
		m/m	m/m	KG	25 Km/H
3.50-5	2.75/3.00	292	100	5.5	550
4.00-8	2.50/3.00/3.75	405	105	11	800
15×4 1/2-8	3.00	381	115	10	850
16×5-8	3.75	406	125	14	1000
16×6-8	4.33	415	148	15.5	1150
5.00-8	3.00	455	125	16.5	1150
18×7-8	4.33	455	170	22	1800
6.00-9	4.00	540	150	28	1600
21×8-9	6.00	525	190	35	2400
140/55-9	4.00	380	135	10.5	1000
400-10	2.75	410	100	8.5	850
6.50-10	5.00	575	162	35.5	2000
7.50-10	5.50	650	175	53	2500
200/50-10	6.50	460	205	24.5	1900
23×9-10	6.50	580	210	46.5	3000
4.50-12	3.00	535	115	18	1300
7.00-12	5.00	667	170	48	2500
8.25-12	5.00	714	188	60.5	3400
23×7-12	5.00	560	174	29.5	1900
23×10-12	8.00	580	245	50	3000
23×12-12	10.00	580	295	60	3300
27×10-12	8.00	675	245	74	3500
27×6.5-15	5.50	665	180	42.5	2500
5.50-15	4.50	665	155	36	1900
6.00-15	4.50	665	155	36	1900
7.00-15	5.50/6.00	740	178	61	3000
7.50-15	5.50/6.00	800	184	75	3400
8.15-15	7.00	710	211	62	3000
250-15	7.00/7.50	710	238	71	3800
8.25-15	6.50	820	206	89	4200
300-15	8.00	820	260	110	5000
28×12.5-15	9.75	718	310	94.5	4800
32×12.5-15	9.75	820	300	130	5000
355/65-15	9.75	840	360	157	6200
7.50-16	5.50/6.00	800	184	73	3400
8.25-16	6.00	845	212	95	3800
9.00-16	7.00	845	237	107.5	4500
26×8-16	6.00	650	175	43	2700
28×9-16	6.00	717	210	56	3000
8.25-20	6.00/6.5	980	220	125	5000
9.00-20	7.00	980	220	125	5000
10.00-20	7.00/7.50/8.00	1040	250	166	6000
11.00-20 SU	7.00/7.50/8.00	1040	250	166	6000
11.00-20 SUW	8.00	1040	275	185	6500
11.00-20	7.50/8.00/8.50	1100	265	211	6500
12.00-20	7.50/8.00/8.50	1100	265	211	6500
12.00-20	8.50	1040	305	203	7000
12.00-20	8.00/8.50	1140	295	248	7000
16/70-20	8.50	1050	305	208	7500
380/70-20	12.00	1040	385	265	9000
13.00-20	10.00	1140	335	287	8500
14.00-20	10.00	1250	350	380	10000
305/70-24	8.50	1040	305	176	7500
12.00-24	8.00/8.50	1210	304	264	7800
13.00-24	8.50	1250	320	315	8800
14.00-24	10.00	1320	340	386	10500
14.00-25	10.00/11.25	1320	340	386	10500
16.00-25	11.25	1500	410	635	13000



三十年专注实心胎
我们一直在努力...

The best choice, kobura solid tires!

SKID LOADER SOLID TIRE

滑移装载机实心胎

PATTERN 801H

绝佳的稳定性及负荷性，
可以在陡峭及险恶的工作环境中来去自如。

Extra ballast for handling
heavy loads excellent stability
and traction for all tough jobs.



KOBURA

SIZE	RIM	O.D.	S.W.	WEIGHT	CAPACITY
		m/m	m/m	KG	25 Km/H
5.70-12	4.00	570	146	25.5	1300
23×8.5-12	5.00	580	190	34	1700
27×8.5-15	5.50	675	200	46.5	2100
27×12-15	8.50	675	280	69	2600
30×8.5-16	6.00	762	200	55	2000
30×10-16	6.00	760	240	69	2200
31×10.5-16	6.00	807	235	80	2400
33×12-16	8.00	820	286	99.5	3200
32.5×15-16	11.25	820	374	122	3600
30×10-18	7.00	767	240	62.5	2200
31×10.5-18	7.00	807	235	73.5	2400
30×10-20	7.00	767	240	56	2200
31×10.5-20	7.00	807	235	66	2400
32×10-20	7.00	820	250	70.5	2600
33×12-20	8.00	830	285	85	3000
36.5×12-20	8.00	935	299	126	3600
36.5×14-20	11.00	920	350	149	4000
38.5×14-20	11.00	970	342	170	4200
385/70-20	10.00	1060	360	227	6500
445/65-20	12.00	1060	420	265	7500
15.00-20	11.00	965	345	168	4200
18.00-20	12.00	1060	430	275	6800
16/70-20	10.00	1055	365	230	6600
13.00-24	8.50	1270	320	288	6800
14.00-24	8.50/10.00	1340	340	370	8000
385/65-24	10.00	1060	360	192	6500
445/65-24	12.00	1150	430	290	8500
15.5-25	11.25	1270	390	355	7800
17.5-25	14.00	1340	440	458	8500
23.5-25	19.50	1620	580	965	12000
26.5-25	22.00	1750	670	1353	14500



TELEHANDLER SOLID TIRE

高空作业车实心胎



三十年专注实心胎
我们一直在努力...

*Once you use Kobura,
you'll never go back!*

SCISSOR BOOM LIFT TIRES

剪叉式登高车轮胎

PATTERN **KP7系列**

采用进口橡胶原料及配方，高耐磨、
抗撕裂、不掉块，增加使用寿命。


Our solid tire are made by imported rubber material
and compound that has high anti-abrasion,
cut resistance, no tire chunk and extend the tire life.



KP701



KP702

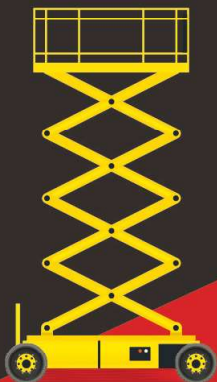

KOBURA

SIZE		Max Load (kg)			Other Industrial 16km/h
		10km/h			
inch	mm	PATTERN	Load Wheel	Rotation Wheel	
10×3	254×76	KP707	540	485	420
12×4	----	KP705	550	440	400
200×8	----	KP703	555	450	405
----	305×100	KP704	550	440	400
12×4.5	306×115×237	KP701	970	865	750
12×4.5	306×115×237	KP702	970	865	750
12.5×4.25	317×127×246	KP706	1100	990	865
12 3/4×4	323×100	KP703	850	750	675
15×5	381×127	KP701	1290	1150	995
15×5	381×127	KP702	1290	1150	995
16×5	406×125	KP708	1400	1150	1080
22×7×17 3/4	559×178×450.8	KP701	4230	3720	3250
31×6×10	787×152×254 (Instead 10-16.5)	KP702	4250	3120	3260
33×6×11	838×152×279 (Instead 12-16.5)	KP702	5060	3900	3700



KP703



KP704



KP705



KP706



KP707



KP708



三十年专注实心胎
我们一直在努力...

Keep you rolling on

SKID LOADER SOLID TIRE


PATTERN 902



SIZE	RIM	O.D. m/m	S.W. m/m	WEIGHT KG	CAPACITY 25 Km/H
5.00-8	3.00	457	125	17.5	1150
18x7-8	4.33	455	170	24	1800
6.00-9	4.00	540	150	29.5	1600
21x8-9	6.00	525	190	36.5	2400
6.50-10	5.00	575	160	37	2000
23x9-10	6.50	580	220	51	3000
7.00-12	5.00	667	170	49.5	2500
205/60-15	5.50	630	200	42	2800
8.15-15	7.00	710	211	64	3000
8.25-15	6.50	838	210	96	4500
34x12-20	8.00	855	280	109	4800
9.00-20	7.00	980	220	135	5000
10.00-20	7.00/7.50/8.00	1040	250	178	6000
12.00-20	8.00/8.50	1110	265	220	7000
355/50-20	10.00	863	315	131	6800
12.00-24	8.00/8.50	1200	295	268	7800
14.00-24	10.00	1340	350	431	10500
16.00-25	11.25	1500	410	654	13000
18.00-25	13.00	1610	460	880	15000

PATTERN 902H

SIZE	RIM	O.D. m/m	S.W. m/m	WEIGHT KG	CAPACITY 25 Km/H
30x10-16	6.00	767	230	71	2200
7.50-16	6.00	800	215	77	2800
8.25-16	6.00	838	210	90	3600
30x10-20	7.00	767	248	68	2500
32x10-20	7.00	812	250	80	2900
33x12-20	8.00	820	280	93	3300
14.00-24	10.00	1340	350	410	8000
16.00-25	11.25	1500	410	640	10000
18.00-25	13.00	1610	460	850	12000
17.5-25	14.00	1340	440	525	9500
20.5-25	17.00	1500	510	795	10500
23.5-25	19.50	1610	580	1085	13000
26.5-25	22.00	1720	650	1345	16000



SIZE	RIM	O.D. m/m	S.W. m/m	WEIGHT KG	CAPACITY 25 Km/H
7.50-16	6.00	805	194	71	2600
8.25-16	6.00	845	212	94	3300
30x10-16	6.00	767	240	75	2200
33x12-16	8.00	845	275	110	3200
13.00-24	8.50	1250	320	310	6800
14.00-24	10.00	1320	340	377	8000
50x16-24	11.50	1250	400	388	8000
16.00-25	11.25	1500	410	600	9000
17.5-25	14.00	1340	440	510	8500
20.5-25	17.00	1480	520	765	9600
23.5-25	19.50	1610	590	1042	12000
26.5-25	22.00	1720	650	1345	14500
29.5-25	25.00	1870	740	1855	18500
35/65-33	28.00	2030	850	2360	24000

WHEEL LOADER SOLID TIRE

装载机实心胎

PATTERN 601H

优异的车胎性能及超耐磨，省去因增加工时及维修所衍生的成本。

Provides cost saving by eliminating repair costs, lost wages and productivity due to down time. Best tire performance, longer tire wear, and excellent stability.





三十年专注实心胎
我们一直在努力...

Never downtime!

MINING SOLID TIRE

铲运车、支架搬运车实心胎

PATTERN 601

采用包胶式结构，增强荷载能力；
使用进口橡胶及配比材质，抗撕裂掉块，
增强抓地力和驾驶舒适性。

Our bonded tires are used the imported rubber material and exclusive formulated compound which not only provide a good wear and cut resistance but also increase the loading capacity, traction and a more comfortable operation.



SIZE	O.D.	S.W.	WEIGHT	CAPACITY
	m/m	m/m	KG	25 Km/H
45x13	1140	325	408	10000
45x16	1140	400	460	12500
52x13	1320	340	562	14500
52x18	1320	450	804	16500
52x23.5	1320	605	1008	18500
1320x600	1,320	600	1025	18500
1320x630	1,320	630	1100	20000
1320x660	1,320	660	1270	22000
1320x710	1,320	710	1325	23000
1500x410	1,500	410	930	18000
1516x470	1500	470	1000	20000
1755x455	1750	455	1223	22000
1755x530	1750	530	1450	25000
1840x580	1870	600	1961	28000

MINING SOLID TIRE

PATTERN 601

