

SEAGULL[®]

quality • innovation • power



海鸥机械 SEAGULL
MACHINERY

SEAGULL[®]

常熟海鸥起重机械有限公司
CHANGSHU SEAGULL CRANE & HOIST MACHINERY CO., LTD

地址: 江苏常熟市新港镇洪溪
Add: Xupu, Ningqiang Town, Changshu, Jiangsu, China.
邮编(PT): 215512
电话(TEL): 0566-512-52631331 0566-512-52631795
传真(FAX): 0566-512-52091698 0566-512-52637790
http://www.seagullhoist.com
E-mail: szhxou@public1.sz.js.cn

www.seagullhoist.com

CHANGSHU SEAGULL CRANE & HOIST MACHINERY CO., LTD

公司简介

Corporation Brief Introduction

Changshu Seagull Crane&Hoist Machinery Co., Ltd. was established in 1986. And reformed in 2000 by Japan and china-based partners. Seagull has more than 20 years of experiences in the field of hoist and crane.

Seagull is a manufacturer specialized in designing, developing and producing all kinds of wire rope hoist, electric chain hoist, manual hoist, snatch block, manual winch and riggings hardware.

Our actual land area is 15,000 sq.m. We have advanced CNC machines, roll thread machines, cylindrical surface grinders, spark erosion machines, milling machines, auto destruction test machine, automatic endurance test machines ect.

Seagull adopts a quality management system in accordance to the strict ISO9001:2000. In addition, our electric chain hoist, manual hoist, snatch block are also accredited by German TÜV CE, GS. Seagull objective is to produce high quality lifting products of the most competitive price to all of the customers. Seagull is continuing to improve the manufacturing method, and always keep a constant looking for new advanced technique and design, develop new lifting products.

"Quality, development, credibility, sincerely, cooperation and efficiency are the principles of seagull". We sincerely expect the good business relationship with customers from all of the world. Your inquiry, your order, your quality problem will be high attention and immediate response by seagull.





电动葫芦系列 Electric Hoist	Electric Hoist JIB Crane Electric Trolley	1-9
手拉葫芦系列 Chain Blocks	Chain Blocks	10-13
手扳葫芦系列 Lever Blocks	Lever Blocks Wire Rope Pulling Hoist	14-15
手动行車系列 Manual Trolleys	Manual Trolleys	16-18
钢板吊系列 Lifting Clamp	Lifting Clamp Permanent magnetic Lifter	19-21
卷扬机系列 Hand Winch	Electric Winch Hand Winch	22-24
牵引器系列 Cable Puller	Cable Puller Ratchet Puller Cable Grips	24-25
千斤頂 Mechanical Jack	Farm Jack Jack Stand Mechanical Jack, Beam Clamp	26-27
滑車系列 Sheave Blocks	Traveling Blocks Snatch Blocks MT Blocks, Pulley Blocks	28-33
卸扣系列 Rigging Hardware	Forged Master Link Shackle	34-35
安全鉤系列 Self-Locking Hook	Self-Locking Hook	35-36
吊裝帶系列 Webbing Sling	Lashing Chain, Lifting Chain Cargo Lashing	37-38
油桶吊系列 Drum Lifter	Drum Lifter	39
其它产品 Other	Chain Binder, Connecting Link Steel Pulley, Block Baner Hooks	40

SEAGULL®

ELECTRIC HOIST

FEATURES

- Capacity from 800kg to 5000kg.
- Quality chain is supplied by RC-AMF.
- Most handle safety tools without break.
- Compact and safe, self-contained with most protection device.
- Push button is with 24V low voltage to guarantee safety.
- Limit switch.
- Limit load device is fitted.
- Both single phase and three phase are available.
- CE certified.
- IP54 protection on electric part for dust and water proof protection.



海鸥®

ELECTRIC HOIST



HHXG2 单相环链电动葫芦 SUSPENDED TYPE SINGLE PHASE ELECTRIC CHAIN HOIST


Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 1-phase Output: 10 Class: 1.00	Load Chain Element: Number of links	Dynamical Test (KN)	Min. Headroom Max(Gross)	Net Weight (kg)	Major Dimension (approx) (mm)										
									A	B	C	D	E	F	G	H			
HHXG205	0.5	3	5.2	0.8	F-40	7.1	1	5.5	545	64	249	249	168	148	35	640	197		
HHXG210	1	3	5.2	1.2	F-40	7.1	1	11	580	66	249	249	168	148	32	640	197		
HHXG220	2	3	5.6	1.2	F-40	7.1	2	22	740	72	249	249	134	188	38	675	231		
HHXG230	3	3	1.7	1.2	F-40	7.1	3	33	790	80	249	249	108	214	41	658	265		

HHXG3 三相环链电动葫芦 SUSPENDED TYPE THREE PHASE ELECTRIC CHAIN HOIST

Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 3-phase Output: 10 Class: 1.00	Load Chain Element: Number of links	Dynamical Test (KN)	Min. Headroom Max(Gross)	Net Weight (kg)	Major Dimension (approx) (mm)										
									A	B	C	D	E	F	G	H			
HHXG305	0.5	3	5.2	0.8	F-40	7.1	1	5.5	545	64	249	249	168	148	35	640	197		
HHXG310	1	3	5.2	1.6	F-40	7.1	1	11	580	66	249	249	168	148	32	640	197		
HHXG320	2	3	5.2	1.6	F-40	7.1	2	22	740	72	249	249	134	188	38	675	231		
HHXG330	3	3	2.1	1.6	F-40	7.1	3	33	790	80	249	249	108	214	41	658	265		
HHXG350	5	3	1.2	1.6	F-40	7.1	5	55	950	136	249	249	9	309	48	703	280		

HHXG3 三相双速环链电动葫芦 DOUBLE SUSPENDED TYPE THREE PHASE ELECTRIC CHAIN HOIST

Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 3-phase Output: 10 Class: 1.00	Load Chain Element: Number of links	Dynamical Test (KN)	Min. Headroom Max(Gross)	Net Weight (kg)	Major Dimension (approx) (mm)										
									A	B	C	D	E	F	G	H			
HHXG305B	0.5	3	5.2/1.7	0.8/0.25	F-40	7.1	1	5.5	545	64	249	249	168	148	35	640	197		
HHXG310B	1	3	5.2/1.7	1.2/0.4	F-40	7.1	1	11	580	66	249	249	168	148	32	640	197		
HHXG320B	2	3	2.8/0.86	1.2/0.4	F-40	7.1	2	22	740	72	249	249	134	188	38	675	231		
HHXG330B	3	3	1.7/0.56	1.2/0.4	F-40	7.1	3	33	790	80	249	249	108	214	41	658	265		
HHXG350B	5	3	1.0/0.35	1.2/0.4	F-40	7.1	5	55	950	136	249	249	9	309	48	703	280		

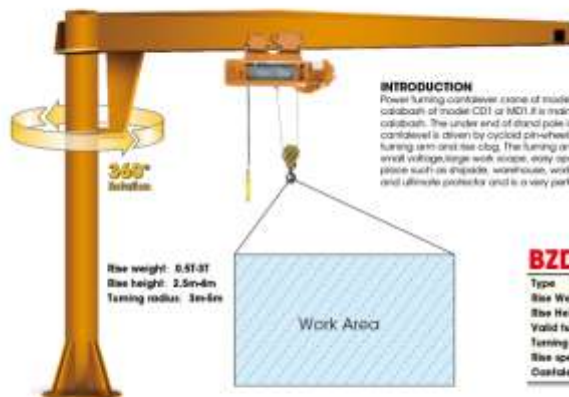

Net weight: 0.51-3T
Rise height: 2.5m-6m
Turning radius: 3m-8m

Work Area

INTRODUCTION


Power turning cantilever crane of model BZD is a kind of crane matched with power catwalk of model CD1 or MD1. It is mainly made of stand pole, turning arm and power catwalk. The under end of stand pole is fixed on concrete base by feet bolts. Turning of cantilever is driven by cycloid pin-wheel reducer. Power catwalk moves in line on the turning arm and rise dog. The turning arm is manual driven. With its simple structure, small voltage, large work scope, easy operate, flexible turn, this kind of crane is fit for fixed place such as shipyard, warehouse, workshop. This kind of crane has safety protector and ultimate protector and is a very perfect kind of cranes.

BZD 吊机 ELECTRIC FULL-ROTATION JIB CRANE

Type	BZD
Net Weight(T)	0.5T, 1T, 2T, 3T
Rise Height H(m)	2.5m, 3m, 4m
Valid turning radius R(m)	3m, 4m, 5m
Turning angle	360°
Rise speed(m/min)	8 or 8/0.8
Cantilever turning speed(t/min)	0.7-1.5

JIB CRANE

Don't leave anything suspended from the jib crane when you finish using it.

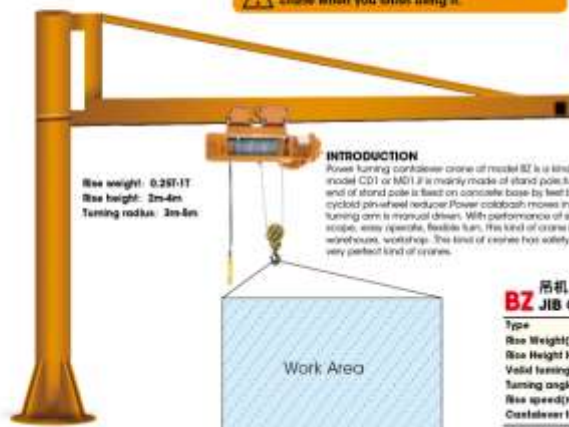

Net weight: 0.25T-1T
Rise height: 3m-6m
Turning radius: 3m-8m

Work Area

INTRODUCTION

Power turning cantilever crane of model BZ is a kind of crane matched with power catwalk of model CD1 or MD1. It is mainly made of stand pole, turning arm and power catwalk. The under end of stand pole is fixed on concrete base by feet bolts. Turning of cantilever is driven by cycloid pin-wheel reducer. Power catwalk moves in line on the turning arm and rise dog. The turning arm is manual driven. With its simple structure, small voltage, large work scope, easy operate, flexible turn, this kind of crane is fit for fixed place such as shipyard, warehouse, workshop. This kind of crane has safety protector and ultimate protector and is a very perfect kind of cranes.

BZ 吊机 JIB CRANE

Type	BZ
Net Weight(T)	0.25T, 0.5T, 1T
Rise Height H(m)	3m, 2.5m, 3m, 4m
Valid turning radius R(m)	3m, 4m, 5m
Turning angle	<30°
Rise speed(m/min)	8 or 8/0.8
Cantilever turning speed(t/min)	0.7-1.5

For project ideas and tips
www.seagullhoist.com

3




Features:

- Aluminum body
- Quality chain is supplied by REC Japan
- Most tensile safety hooks without back
- Compact and high efficient motor with heat protection device
- Choose double speed motor big power and different voltage are available
- Push button is with 24V low voltage to guarantee safety and limit switch system
- Sensitive brake system. Friction disk without catwalk
- Choose precise process of high tensile helix gear working system to keep lower noise
- Through Chain bucket set space to suit different lifting length
- IP54 protection on electric hoist for dust and water protection
- In class II



SG 电动葫芦 ELECTRIC HOIST

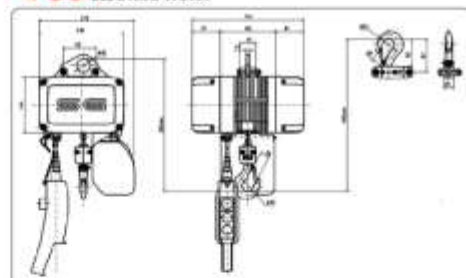


SG ELECTRIC HOIST

Work store	M2	M4	M5	M6	M7					
Capacity	150	180	240	300	360					
Model	SG0001M	SG0002M	SG0003M	SG0004M	SG0005M					
Lifting speed (min/m)	8	8/2	8/2	8/2	8/2					
Lifting height (m)	3	3	3	3	3					
Power (kW)	0.8	0.8	0.8	0.8	0.8					
Weight (kg)	25	25	25	25	25					
	SG0006M	SG0007M	SG0008M	SG0009M	SG0010M					
Capacity	450	600	900	1200	1500					
Lifting speed (min/m)	8	8/2	8/2	8/2	8/2					
Lifting height (m)	3	3	3	3	3					
Power (kW)	0.8	0.8	0.8	0.8	0.8					
Weight (kg)	27	27	27	27	27					
	SG0011M	SG0012M	SG0013M	SG0014M	SG0015M					
Capacity	200	250	300	360	450					
Lifting speed (min/m)	8	8/2	8/2	8/2	8/2					
Lifting height (m)	3	3	3	3	3					
Power (kW)	0.8	0.8	0.8	0.8	0.8					
Weight (kg)	27	27	27	27	27					
	SG0016M	SG0017M	SG0018M	SG0019M	SG0020M					
Capacity	100	125	150	180	225					
Lifting speed (min/m)	8	8/2	8/2	8/2	8/2					
Lifting height (m)	3	3	3	3	3					
Power (kW)	0.8	0.8	0.8	0.8	0.8					
Weight (kg)	27	27	27	27	27					

4

For project ideas and tips
www.seagullhoist.com


SCH2 单相电动葫芦 ELECTRIC HOIST (SINGLE PHASE)

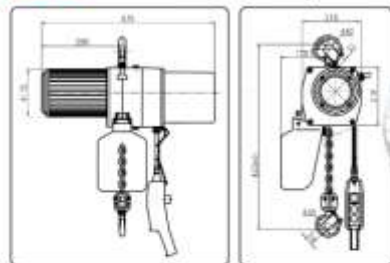

SCH2 ELECTRIC HOIST (SINGLE PHASE)

Model	Work Class	Capacity (Tons)	Lifting Height (m)	Lifting Speed (m/min)	1-Phase 220V/50Hz 400W		Load Chain	Test Load (kN)	Net Weight (kg)		
					0.3m	0.6m	7.1*21	7.1*21			
SC1000	M6/N6	250	3	4.9	0.3	F	954	7.1*21	1	27.5	45
SC1300	M6/N6	300	3	4.9	0.6	F	954	7.1*21	1	55	47
SC1100	M6/N6	1000	3	4.9	0.9	F	954	7.1*21	1	110	50
SC1300	M6/N6	2000	3	2.45	2.45	F	954	7.1*21	2	220	55

SCH3 三相电动葫芦 ELECTRIC HOIST (THREE PHASE)


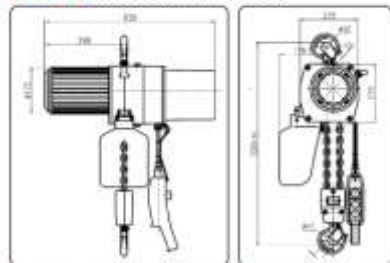


SCH3 ELECTRIC HOIST (THREE PHASE)

Model	Work Class	Capacity (Tons)	Lifting Height (m)	Lifting Speed (m/min)	3-Phase 380V/50Hz 400W	Load Chain	Test Load (kN)	Net Weight (kg)
SC1000	M6/N6	250	3	4.9	0.3	F 954	7.1*21	1 27.5 45
SC1300	M6/N6	300	3	4.9	0.6	F 954	7.1*21	1 55 47
SC1100	M6/N6	1000	3	4.9	0.9	F 954	7.1*21	1 110 50
SC1300	M6/N6	2000	3	2.45	2.45	F 954	7.1*21	2 220 55




SG-I 单相钢丝绳电动葫芦 SINGLE PHASE ELECTRIC WIRE ROPE HOIST

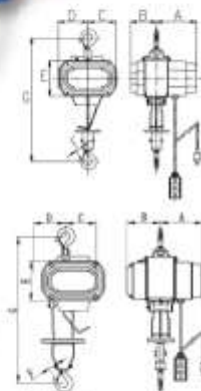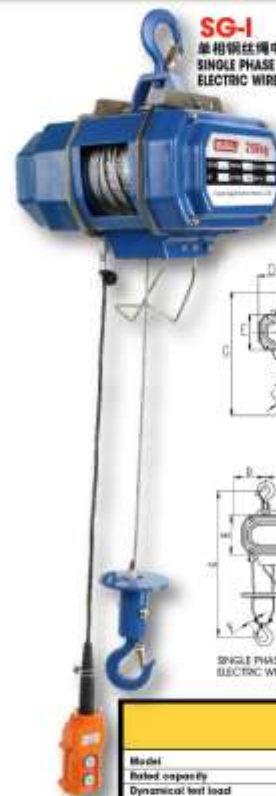

SINGLE PHASE
ELECTRIC WIRE ROPE HOIST

SG-II 单相环链电动葫芦 SINGLE PHASE ELECTRIC CHAIN HOIST

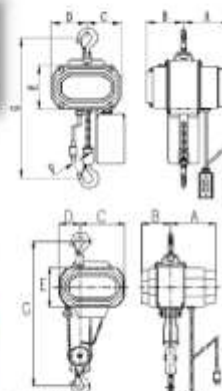

SINGLE PHASE
ELECTRIC CHAIN HOIST


SG-I SINGLE PHASE ELECTRIC WIRE ROPE HOIST				SG-II SINGLE PHASE ELECTRIC CHAIN HOIST		
Model	SG-I-125	SG-I-250	SG-I-500	SG-II-125	SG-II-250	SG-II-500
Rated capacity	125kg	250kg	500kg	125kg	250kg	500kg
Dynamical test load	1.375kN	2.75kN	5.5kN	1.375kN	2.75kN	5.5kN
Standard lift	30m	30m	30m	3m	3m	3m
Lifting speed	10m/min	10m/min	5m/min	2m/min	2m/min	3.5m/min
H.O. of load chain	1	2	2	1	1	2
Wire Dia / Load chain dia	φ 10	φ 10	φ 10	φ 10	φ 10	φ 10
Major dimensions						
A	170mm	170mm	170mm	170mm	170mm	170mm
B	110mm	110mm	110mm	110mm	110mm	110mm
C	123mm	123mm	123mm	123mm	123mm	123mm
D	123mm	123mm	89mm	123mm	123mm	89mm
E	154mm	154mm	154mm	154mm	154mm	154mm
F	30mm	30mm	30mm	30mm	30mm	30mm
G	300mm	300mm	370mm	340mm	340mm	340mm




CD(MD) 钢丝绳电动葫芦 WIRE ROPE HOIST

**0.25T, 0.5T, 1T,
2T, 3T, 5T, 10T**


For project ideas and files
www.seagullhoist.com




CD1 0.25T Hoist Drawing




CD1 10T Hoist Drawing



MD1 0.25T Hoist Drawing



MD1 10T Hoist Drawing



Suit for all kinds of Position to Installation

CD(MD) 钢丝绳电动葫芦 WIRE ROPE HOIST

CD(MD) 钢丝绳电动葫芦 WIRE ROPE HOIST		CD1(MD1) 0.25T - 2T	
Capacity	T	0.25	0.5
Lifting height	m	3 6 9 12	6 9 12 18 24 30
Lifting speed	m/min	8	8(5/0.8)
Running speed	m/min	20	20
I-beam track mode (GB706-88)		12-200	16-200
Min. Radius	m	1.5 1.1	1.5 2 2.5 3.6
Motor power	kW	0.4	0.8(0.8/0.2)
Running motor power	kW	0.08	0.2
L	mm	286 380 549 615	616 688 760 904
L (MD1)	mm	626 694 770 914	770 895 965 1140 1365 1590
L'	mm	704 108 287 353	318 390 462 606
F	mm	286	490
F'	mm	138	190
Φ	mm	4-Φ11	4-Φ15
Φ	mm	90	120
h	mm	425 432	500 600
h	mm	258 415	897
B max	mm	258 415	897
Weight 10%	CD2 Two direction movement. Single speed	kg	33 47 61 85
	CD1 Four direction movement. Single speed	kg	61 85 109 133
	MD2 Two direction movement. Double speed	kg	88 93 98 103
	MD1 Four direction movement. Double speed	kg	135 180 186 170

CD(MD) 钢丝绳电动葫芦 WIRE ROPE HOIST		CD1(MD1) 3T - 10T	
Capacity	T	3	5
Lifting height	m	6 9 12 18 24 30	6 9 12 18 24 30
Lifting speed	m/min	8(5/0.8)	8(5/0.8)
Running speed	m/min	20	20
I-beam track mode (GB706-88)		250-320	250-430
Min. Radius	m	1.8 2 3 4	1.8 2 2.5 3.5
Motor power	kW	4.5(1.5/0.6)	7.5(2.5/0.8)
Running motor power	kW	0.4	0.8
L	mm	930 1030 1130 1342 1548 1754	1052 1157 1262 1472 1682 1892
L (MD1)	mm	940 1040 1140 1352 1558 1764	1062 1167 1272 1482 1692 1902
L'	mm	483 554 627 663 1069 1270	485 590 685 908 1115 1325
F	mm	866	1014
F'	mm	264	320
Φ	mm	4-Φ25	4-Φ32
Φ	mm	125	208
h	mm	961 1064	1177 1327
h	mm	935	1067
Weight 10%	CD2 Two direction movement. Single speed	kg	234 250 276 310 344 374
	CD1 Four direction movement. Single speed	kg	308 330 362 406 434 472
	MD2 Two direction movement. Double speed	kg	284 290 305 320 354 384
	MD1 Four direction movement. Double speed	kg	323 338 355 409 463 493



SEAGULL®

ELECTRIC TROLLEY



HHBD3
三相电动小车
THREE PHASE ELECTRIC TROLLEY

HHBD3 THREE PHASE ELECTRIC TROLLEY				
Model	HHBD310	HHBD320	HHBD350	HHBD3100
Rated Capacity(kg)	1000	2000	3000	5000
Beam Width(mm)	75-150	75-180	150-180	100-190
Dimensions(mm)	A	27.5	36.5	42.5
	B	265	265	265
	C	260	260	260
	D	27	36	42
	E	10	10	13
Running Speed(m/min)	20	20	15	15
Ins Class	F	F	F	F
% ED	40	40	40	40
Motor Output(kw)	0.3	0.3	0.3	0.4
Net Weight(kg)	43	45	47	92

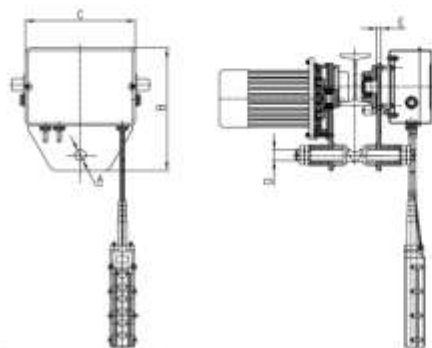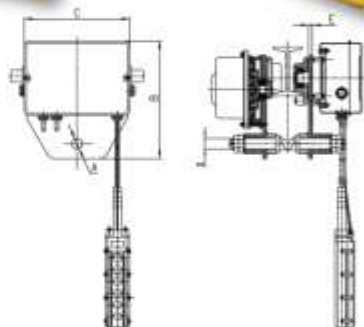

HHBD2
单相电动小车
SINGLE PHASE ELECTRIC TROLLEY

HHBD2 SINGLE PHASE ELECTRIC TROLLEY	
Model	HHBD210 HHBD220
Rated Capacity(kg)	1000 2000
Beam Width(mm)	75-180 75-180
Dimensions(mm)	A
	27.5
	36.5
	42.5
	48.5
Dimensions(mm)	B
	265
	265
	265
	265
Dimensions(mm)	C
	260
	260
	260
	260
Dimensions(mm)	D
	27
	36
	42
	48
Dimensions(mm)	E
	10
	10
	13
	16
Running Speed(m/min)	20 20
Ins Class	F F
% ED	40 40
Net Weight(kg)	43 45


For project ideas and tips
www.seagullhoist.com

9

海鸥®

CHAIN BLOCK

HSZ-B
手拉葫芦
CHAIN BLOCKS

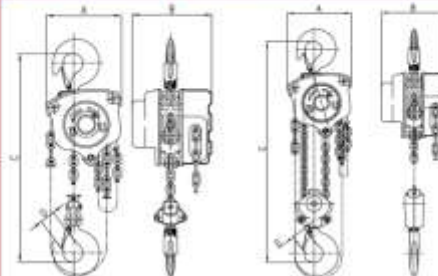

HSZ-B Chain Block (Single Chain)

HSZ-B Chain Block (Double Chain)

HSZ-B 手拉葫芦 CHAIN BLOCKS											
Model	HSZ-0.5B	HSZ-1B	HSZ-1.5B	HSZ-2B	HSZ-3B	HSZ-5B	HSZ-10B	HSZ-15B	HSZ-20B	HSZ-30B	HSZ-50B
Rated load (T)	0.5	1	1.5	2	3	5	10	15	20	30	50
Standard lift (m)	2.5	2.5	2.5	2.5	3	3	3	3	3	3	3
Test load (T)	0.75	1.5	2.25	3	4.5	7.5	12.5	18.75	25	37.5	57.5
Blocks required at capacity (N)	252	324	305	230	402	430	438	447	438	442	
Diameter of load chain (mm)	8	6	7.1	6	7.1	10	13	13	16	16	
No. of load chains	1	1	1	2	2	3	4	4	4	4	12
Dimensions (mm)	A	127	156	180	186	180	230	230	410	405	1110
	B	115	151	142	151	142	171	171	206	215	596
	C	268	324	415	459	526	660	738	823	1002	1300
Net weight (kg)	7	10.5	15.5	16	20	39	49	65	108	207	
Extra weight per meter of extra lift (kg)	1.5	1.8	2	2.7	3.2	3.3	4.8	14.2	19.6	23.8	

10

For project ideas and tips
www.seagullhoist.com



手拉葫芦 CHAIN BLOCKS										
HSZ-A 0.5 Ton - 30 Ton										
Model	Rated Load (Ton)	Standard Lift (m)	Test Load (Ton)	Efforts Required at Capacity (N)	Diameter of Load Chain (mm)	No. of Load Chains	Major Dimensions (approx.) (mm)			
							A	B	C	D
HSZ-0.5A	0.5	2.5	3.75	262	8	1	120	111	340	28
HSZ-1A	1	2.5	3.75	314	8	1	147	126	376	32
HSZ-1.5A	1.5	2.5	3.75	366	10	1	161	140	410	36
HSZ-2A	2	2.5	3	420	10	2	167	135	485	35.5
HSZ-3A	3	3	4.5	472	10	2	181	147	530	37
HSZ-5A	5	3	7.5	490	10	2	224	177	620	38
HSZ-10A	10	3	12.5	438	10	4	372	177	737	49
HSZ-20A	20	3	25	438	10	8	638	195	1002	54
HSZ-30A	30	3	37.5	442	10	10	702	207	1090	55

手拉葫芦 CHAIN BLOCKS										
HSZ-J 0.5 Ton - 30 Ton										
Model	Rated Load (Ton)	Standard Lift (m)	Test Load (Ton)	Efforts Required at Capacity (N)	Diameter of Load Chain (mm)	No. of Load Chains	Major Dimensions (approx.) (mm)			
							A	B	C	D
HSZ-0.5J	0.5	2.5	3.75	262	8	1	120	111	340	28
HSZ-1J	1	2.5	3.75	314	8	1	147	126	376	32
HSZ-1.5J	1.5	2.5	3.75	366	10	1	161	140	410	36
HSZ-2J	2	2.5	3	420	10	2	167	135	485	35.5
HSZ-3J	3	3	4.5	472	10	2	181	147	530	37
HSZ-5J	5	3	7.5	490	10	2	224	177	620	38
HSZ-10J	10	3	12.5	438	10	4	372	177	737	49
HSZ-20J	20	3	25	438	10	8	638	195	1002	54
HSZ-30J	30	3	37.5	442	10	10	702	207	1090	55

手拉葫芦 CHAIN BLOCKS										
HSZ-K 0.5 Ton - 30 Ton										
Model	Rated Load (Ton)	Standard Lift (m)	Test Load (Ton)	Efforts Required at Capacity (N)	Diameter of Load Chain (mm)	No. of Load Chains	Dimensions (mm)			
							A	B	C	D
HSZ-0.5K	0.5	2.5	3.75	262	8	1	120	111	340	28
HSZ-1K	1	2.5	3.75	314	8	1	147	126	376	32
HSZ-1.5K	1.5	2.5	3.75	366	10	1	161	140	410	36
HSZ-2K	2	2.5	3	420	10	2	167	135	485	35.5
HSZ-3K	3	3	4.5	472	10	2	181	147	530	37
HSZ-5K	5	3	7.5	490	10	2	224	177	620	38
HSZ-10K	10	3	12.5	438	10	4	372	177	737	49
HSZ-20K	20	3	25	438	10	8	638	195	1002	54
HSZ-30K	30	3	37.5	442	10	10	702	207	1090	55

手拉葫芦 CHAIN BLOCKS										
HSZ-E 0.5 Ton - 30 Ton										
Model	Rated Load (Ton)	Standard Lift (m)	Test Load (Ton)	Efforts Required at Capacity (N)	Diameter of Load Chain (mm)	No. of Load Chains	Dimensions (mm)			
							A	B	C	D
HSZ-0.5E	0.5	2.5	3.75	262	8	1	142	126	280	28
HSZ-1E	1	2.5	3.75	314	8	1	162	136	300	32
HSZ-1.5E	1.5	2.5	3.75	366	10	1	178	142	340	36
HSZ-2E	2	2.5	3	420	10	2	182	136	380	35.5
HSZ-3E	3	3	4.5	472	10	2	198	142	410	37
HSZ-5E	5	3	7.5	490	10	2	218	146	430	38
HSZ-10E	10	3	12.5	438	10	4	358	146	710	49
HSZ-20E	20	3	25	438	10	8	638	146	1000	54
HSZ-30E	30	3	37.5	442	10	10	688	162	1080	55


SEAGULL®

CHAIN BLOCKS



HSZ-D 手拉葫芦 CHAIN BLOCKS

SINGLE CHAIN

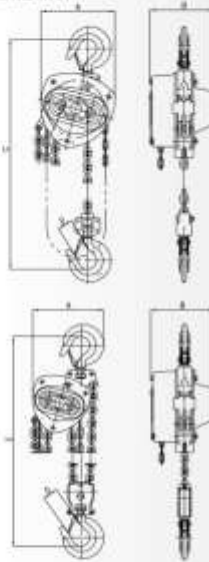

DOUBLE CHAIN

HSZ-D 手拉葫芦 CHAIN BLOCKS


0.5 Ton - 30 Ton

Model	HSZ-0.5D	HSZ-1D	HSZ-1.5D	HSZ-2D	HSZ-3D	HSZ-5D	HSZ-10D	HSZ-20D	HSZ-30D
Rated load (T)	0.5	1	1.5	2	3	5	10	20	30
Standard lift (m)	2.5	2.5	2.5	2.5	2	3	5	2	2
Test load (T)	0.75	1.5	2.25	3	4.5	7.5	12.5	25	37.5
Wtths required at capacity (N)	224	281	290	328	372	332	342	342	417
Diameter of load chain (mm)	6	6	7.1	8	10	8	9	8	10
No. of load chains	1	1	1	1	1	2	4	8	10
Dimensions (mm) A	148	173	195	211	254	279	463	840	733
B	133	150	173	176	206	201	201	201	287
C	346	376	442	470	549	688	766	990	1112
D	28	32	36	40	48	55	61	82	82
Net weight (kg)	9.3	12	17	19.7	33.1	42.5	73.4	146.2	236
Extra weight per meter of extra lift (kg)	1.5	1.8	2.1	2.4	3.1	4.6	8.2	15.4	30.7

For project ideas and tips
www.seagullhoist.com

海鸥®

LEVER BLOCKS



HSH-V LEVER BLOCKS



HSH-V - LEVER BLOCKS 手扳葫芦

Model	HSH-V1.5	HSH-V5	HSH-V7.5	HSH-V10	HSH-V15	HSH-V20	HSH-V30	HSH-V50	HSH-V70
Rated load (T)	1.5	5	7.5	10	15	20	30	50	70
Test load (T)	2.25	7.5	11.25	15	22.5	30	45	75	105
Standard lift (m)	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Min. distance between two hooks (mm)	295	260	295	295	335	380	450	610	720
Wtths required at capacity (N)	217	303	340	380	524	591	763	1291	1575
No. of load chains	1	1	1	1	1	1	1	2	2
Diameter of load chain (mm)	4	5	6	6	7.1	8	10	13	16
Dimensions (mm) A	91	115	122	122	135	150	181	232	264
B	76	83	128	128	148	160	181	232	264
C	205	282	295	295	335	380	450	610	720
D	153	240	256	256	268	268	268	348	348
E	11	20	26	26	30	33	34	47	54
Net weight (kg)	1.85	4.5	7.7	9	15.6	14.8	20	39	46

For project ideas and tips
www.seagullhoist.com

SEAGULL®


LEVER BLOCKS

海鷗®

MANUAL TROLLEYS

HSB-C - LEVER BLOCKS 手扳葫芦

Model	HSB-7.5C	HSB-15C	HSB-30C	HSB-60C	HSB-120C
Rated load (T)	0.75	1	1.5	3	6
Test load (T)	1.125	1.5	2.25	4.5	9
Standard lift (m)	1.6	1.5	1.5	1.5	1.5
Min. distance between two hooks(mm)	167	195	264	372	502
Min. required of capacity (kg)	160	180	250	363	570
No. of load chain	1	1	1	1	2
Diameter of load chain (mm)	6	6	7.1	10	10
Dimensions (mm)					
A	148	168	182	195	191
C	128	128	146	161	244
B	295	310	335	405	550
E	258	258	348	358	368
F	28	26	36	34	47
Net weight (kg)	7.5	7.8	10.4	17.2	26



HSB-C - LEVER BLOCKS

Used in terminals, mining, shipbuilding, construction, transport, telecommunications and other sectors of the equipment installation, lifting objects, pulling parts, parts binding, the line taut and welding and other occasions.



LEVER BLOCKS

HSB-C 手扳葫芦
LEVER BLOCKS




ZNL 钢丝绳手扳葫芦 Wire Rope Pulling Hoist

Model	ZNL-400	ZNL-600	ZNL-1000	ZNL-1600	ZNL-2500	ZNL-4000
Rated forward hand power	241	438	638	938	1438	2438
Rated capacity	800	1000	1600	2500	4000	6000
Rated forward travel (bring it forward and backward)	252	252	252	252	252	252
Rope diameter	8.3	11	14	18	22	28
Max rope safety factor load capacity	5	5	5	5	5	5
Safety factor & static load capacity	5	5	5	5	5	5
Max. travelling load	1200	2400	4000	6000	10000	16000
Max. outer size A	430	545	660	930	1130	1430
B	230	284	325	480	580	780
C	64	97	116	152	182	242
L1(mm)	80	80	80	80	80	80
L2(mm)	80	120	120	120	120	120
Net weight	14.6	25.4	40.3	98	160	260

WIRE ROPE PULLING HOIST

Multifunctional wire rope hoist system lifts and lowers in different work areas. Heavy-duty design with aluminum alloy housing and auto-adjusting device allows for required rope length.

钢丝绳手扳葫芦
ZNL WIRE ROPE PULLING HOIST

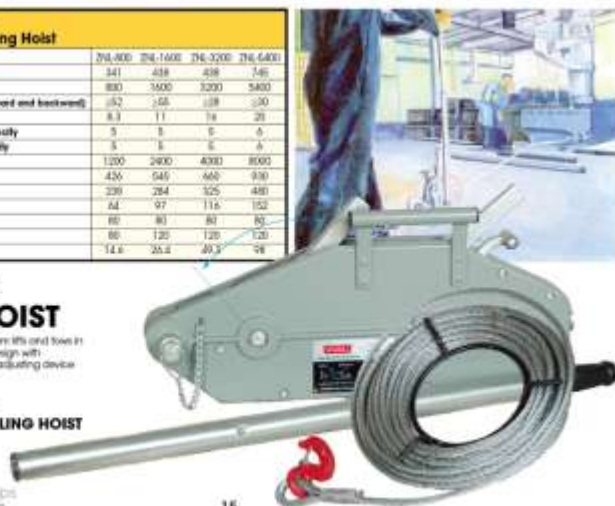

For project ideas and tips
www.seagullhoist.com



CSL-Y4
导轨行车
GEARED TROLLEY

CST-Y4
手拉小车
PLAIN TROLLEY

CST-Y4
PLAIN TROLLEY

CSL-Y4
GEARED TROLLEY

CSL-Y4 GEARED TROLLEY SPECIFICATION

Model	0.5T	1T	2T	3T	5T	10T	15T	20T	30T
Rated capacity (T)	0.5	1	2	3	5	10	15	20	30
Test load (kN)	6.25	12.5	25	37.5	62.5	125	187.5	250	375
Running height (m)	3	5	3	3	3	3	3	3	3
Chain pull to lift full load (kN)	45	55	100	75	130	130	130	130	130
Min radius of curve (m)	0.9	1	1.2	1.3	1.4	1.4	1.4	1.4	1.4
Dimensions (mm)									
A. Pylon	292	300	314	360	380	392	400	414	414
Lengthen pylon	377	385	395	406	414	425	435	445	455
B	225	252	300	360	392	425	455	485	515
C	173	188	226	286	313	373	433	463	493
D	30	31	32	36	47	58	69	80	91
E	-3	-3	-3	-3	-3	-3	-3	-3	-3
F	25	30	40	46	60	75	90	105	120
G	30	35	47	58	75	90	105	120	135
Adjustable beam width									
M. Pylon	50-220	58-230	66-230	74-230	90-230	100-230	110-230	120-230	130-230
Lengthen pylon	160-305	160-305	160-305	160-305	160-305	160-305	160-305	160-305	160-305
Extra weight per meter of extra lift (kg)	-1	-1	-1	-1	-1	-1	-1	-1	-1
Net weight (kg)									
Pylon	11.8	12.7	21.8	26.7	48.5	8.2	10.3	17.5	30.7
Lengthen pylon	11.8	15.2	22.6	27.9	50	8.6	10.8	18.3	31.9

CST-Y4 PLAIN TROLLEY SPECIFICATION



Model	0.5T	1T	2T	3T	5T	10T	15T	20T	30T
Rated capacity (T)	0.5	1	2	3	5	10	15	20	30
Test load (kN)	6.25	12.5	25	37.5	62.5	125	187.5	250	375
Running height (m)	3	5	3	3	3	3	3	3	3
Chain pull to lift full load (kN)	45	55	100	75	130	130	130	130	130
Min radius of curve (m)	0.9	1	1.2	1.3	1.4	1.4	1.4	1.4	1.4
Dimensions (mm)									
A. Pylon	292	300	314	360	380	392	400	414	414
Lengthen pylon	377	385	395	406	414	425	435	445	455
B	225	252	300	360	392	425	455	485	515
C	173	188	226	286	313	373	433	463	493
D	30	31	32	36	47	58	69	80	91
E	-3	-3	-3	-3	-3	-3	-3	-3	-3
F	25	30	40	46	60	75	90	105	120
G	30	35	47	58	75	90	105	120	135
Adjustable beam width									
M. Pylon	50-220	58-230	66-230	74-230	90-230	100-230	110-230	120-230	130-230
Lengthen pylon	160-305	160-305	160-305	160-305	160-305	160-305	160-305	160-305	160-305
Extra weight per meter of extra lift (kg)	-1	-1	-1	-1	-1	-1	-1	-1	-1
Net weight (kg)									
Pylon	11.8	12.7	21.8	26.7	48.5	8.2	10.3	17.5	30.7
Lengthen pylon	11.8	15.2	22.6	27.9	50	8.6	10.8	18.3	31.9

For project ideas and tips
www.seagullhoist.com



TG ▲
手拉小车
TYPE GEARED TROLLEY


TG TYPE GEARED TROLLEY									
Model	Rated Load (T)	Test Load (T)	Chain Pull to Lift Full Load (T)	Dimensions (mm)				I-Beam recommended	Net Weight (kg)
				A	B	C	H		
0.5	0.5	0.75	40	248	196	190	108	65-125	4
1	1	1.5	80	280	226	211	116	80-146	14
2	2	3	160	318	273	256	130	80-168	16
3	3	4.5	160	340	320	295	164	88-168	27
5	5	7.5	170	365	364	334	177	100-170	40
10	10	15	320	410	399	460	237	120-203	90
20	20	30	340	475	706	675	380	120-203	215
30	30	37.5	350	590	625	650	260	100-180	230

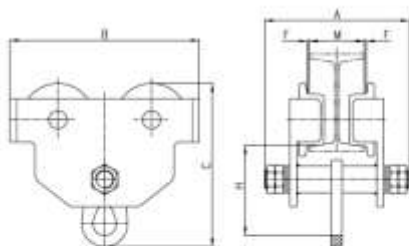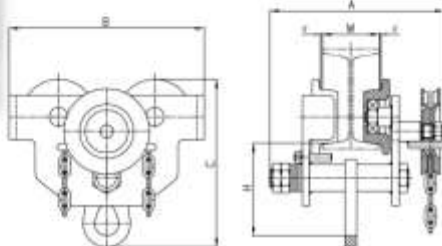

TP TYPE PLAIN TROLLEY									
Model	Rated Load (T)	Test Load (T)	Dimensions (mm)					I-Beam recommended	Net Weight (kg)
			A	B	C	H			
0.5	0.5	0.75	208	196	190	108	65-125	5.5	
1	1	1.5	242	236	211	116	80-146	9.5	
2	2	3	280	273	236	130	80-168	13.5	
3	3	4.5	300	320	295	164	88-168	25	
5	5	7.5	316	356	334	177	100-170	44	
10	10	15	343	389	460	237	120-203	90	





TP ▲
手推小车
TYPE PLAIN TROLLEY

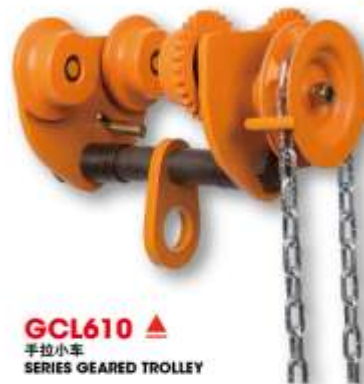

GCL610 ▲
手拉小车
SERIES GEARED TROLLEY

GCL610 SERIES GEARED TROLLEY									
Model	Rated Load (T)	Test Load (T)	Dimensions (mm)					I-Beam recommended	Net Weight (kg)
			A	B	C	H			
0.5	0.5	0.75	271	172	190	108.5	75-125	9	
1	1	1.5	271	206	222	122	75-125	12.4	
1.5	1.5	2.25	308	231	238.5	130	100-150	15.9	
2	2	3	308	240	267	132.5	100-150	17	
3	3	4.5	342	279	319	181	100-150	25	
5	5	7.5	384	318	364	219	125-175	50	
10	10	15	462	380	490	275	125-180	100	

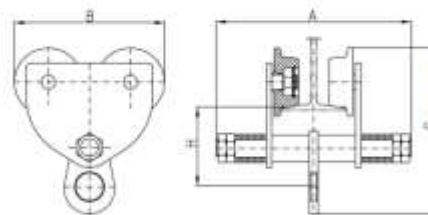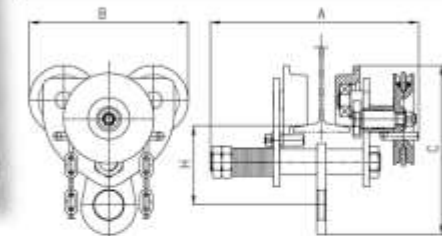

GCT610 SERIES PLAIN TROLLEY									
Model	Rated Load (T)	Test Load (T)	Dimensions (mm)					I-Beam recommended	Net Weight (kg)
			A	B	C	H			
0.5	0.5	0.75	208	172	190	108.5	75-125	3.3	
1	1	1.5	225	206	222	122	75-125	7.9	
1.5	1.5	2.25	360	231	238.5	130	100-150	12	
2	2	3	360	240	267	132.5	100-150	12.2	
3	3	4.5	385	279	319	181	100-150	23	
5	5	7.5	338	318	364	219	125-175	44	
10	10	15	362	380	490	275	125-180	88	



GCT610 ▲
手推小车 / 单轨行车
SERIES PLAIN TROLLEY

SEAGULL®

LIFTING CLAMP

DSQK
雙吊耳
UNIVERSAL
LIFTING CLAMP

DSQC
雙吊耳
UNIVERSAL
LIFTING CLAMP

DSQA
雙吊耳
VERTICAL
LIFTING CLAMP

DHQA
雙吊耳
HORIZONTAL
LIFTING CLAMP

DHQ
雙吊耳
HORIZONTAL
LIFTING CLAMP


DHQL
雙吊耳
HORIZONTAL
LIFTING CLAMP

海鷗®

LIFTING CLAMP

DHQA


雙吊耳
HORIZONTAL
LIFTING CLAMP



Model	DSQA	DSQA-1	DSQA-2	DSQA-3
Rated capacity (T)	2	3	4.5	6
Test load (T)	4	6	9	12
Jaw opening (mm)	0-50	0-60	10-80	10-100
Net Weight (kg)	5.7	7.6	12.5	17.9

DHQ


雙吊耳
HORIZONTAL
LIFTING CLAMP



Model	DSQA-0.75	DSQA-1	DSQA-1.5	DSQA-2	DSQA-3	DSQA-4	DSQA-6
Rated capacity (T)	0.75	1	1.5	2	3	4	6
Test load (T)	1.5	2	3	4	6	8	12
Jaw opening (mm)	0-20	0-30	0-30	0-30	0-40	0-40	0-50
Dimensions (mm) A max.	25	30	30	35	40	40	50
B	125	191	161	175	180	190	165
C	50	65	65	70	70	74	74
D	175	228	208	248	250	255	240
E	25	30	30	30	30	30	30
Net Weight (kg)	2.4	3.4	4.8	5.4	8.0	6.9	5.9

DHQL

雙吊耳
HORIZONTAL
LIFTING CLAMP



Model	DSQA-0.75	DSQA-1	DSQA-1.5	DSQA-2	DSQA-3	DSQA-4	DSQA-6
Rated capacity (T)	0.75	1	1.5	2.5	3	4	6
Test load (T)	1.5	2	3	5	6	8	12
Jaw opening (mm)	0-20	0-30	0-30	20-50	0-40	0-40	0-50
Dimensions (mm) A max.	15	20	25	30	40	40	50
B	100	140	158	200	208	246	246
C	109	157	242	304	328	393	393
D	32	48	48	57	60	66	66
E	40	55	55	74	75	85	85
Net Weight (kg)	1.7	4.5	6.7	11.2	13.4	21.8	21.8

DHQP

雙吊耳
HORIZONTAL
LIFTING CLAMP



Model	DSQA-0.75	DSQA-1	DSQA-1.5	DSQA-2	DSQA-3	DSQA-4	DSQA-6
Rated capacity (T) Single	0.75	1	1.5	2.5	3	4	6
Test load (T) Double	1.5	2	3	5	6	8	12
Jaw opening (mm) Single	15	20	25	30	40	40	50
Double	30	40	50	100	150	150	150
max. Jaw opening (mm)	50	50	60	100	100	100	100
Dimensions (mm) A	6-30	6-35	6-40	6-40	6-40	6-40	6-40
B	9-62	143	158	200	208	246	246
C with	133	220	250	250	250	250	250
E with	16	19	22	35	35	35	35
D max	208	266	317	426	426	426	426
H	100	110	130	165	165	165	165
Net Weight (kg) Single	4.1	7.5	11.4	16.5	16.5	16.5	16.5
Double	8.2	15	22.8	33	33	33	33

DSQA

雙吊耳
VERTICAL
LIFTING CLAMP




Model	DSQA-0.75	DSQA-1	DSQA-1.5	DSQA-2	DSQA-3	DSQA-4	DSQA-6
Rated capacity (T)	0.75	1	1.5	2	3	4	6
Test load (T)	1.5	2	3	4	6	8	12
Jaw opening (mm)	0-10	0-20	0-30	0-40	0-50	0-50	0-50
Dimensions (mm) A max.	16	22	30	40	50	50	50
B	117	129	136	162	182	222	222
C	58	65	79	90	90	90	90
D	220	275	315	355	355	424	424
E	40	50	50	50	50	60	60
Net Weight (kg)	2.6	3.7	5.8	10.3	15.7	15.7	15.7

SEAGULL®


LIFTING CLAMP

DSQC
SEAGULL
UNIVERSAL
LIFTING CLAMP



Model	DSQC-1.5	DSQC-3.0	DSQC-4.5	DSQC-6.0
Rated capacity (T)	0.75	1.5	2	3
Test load (T)	1.5	3	4	6
Jaw opening (mm)	0-18	0-20	0-25	0-30
Dimensions (mm)	A max.			
B	18	20	25	30
C	125	110	175	165
D	45	80	65	102
E	215	270	375	415
F	30	30	30	30
Net Weight (kg)	1.9	6.6	7.2	13.8

DSQK
SEAGULL
UNIVERSAL
LIFTING CLAMP




Model	DSQK-1.5	DSQK-3.0	DSQK-4.5
Rated capacity (T)	1.5	3.0	4.5
Test load (T)	3	6	9
Jaw opening (mm)	20-80	20-90	20-80
Dimensions (mm)	A max.		
B	45	55	55
C	155	205	235
D	72	85	102
E	209	305	415
F	30	30	30
Net Weight (kg)	7.6	13	13.8

YC
永磁器
PERMANENT
MAGNETIC LIFTER



Model	YC-100	YC-300	YC-600	YC-1000	YC-1500	YC-2000	YC-3000	YC-6000
Safety lifting strength (kN)	100	300	600	1000	1500	2000	3000	6000
Cylindrical lifting strength (kN)	50	150	300	500	750	1000	1500	3000
Max. pull-off strength (kN)	200	600	1200	2000	3000	4000	6000	12000
Dimensions (mm)	A max.							
B	52	160	215	235	254	270	402	520
C	42	92	130	135	171	223	275	295
D	67	85	115	118	148	221	266	364
E	140	180	230	230	246	402	520	700
Operation temperature (°C)	-40	-40	-40	-40	-40	-40	-40	-40
Dead weight (kg)	3	10	21	34	53	125	230	395



海鸥®

ELECTRIC WINCH



**2000 LBS. - 9500 LBS.
ELECTRIC WINCH**

These electric winches are designed for use with steel cables and synthetic webbing. They are built to last and are designed to be used in a variety of applications. They are built to last and are designed to be used in a variety of applications. They are built to last and are designed to be used in a variety of applications.



H2000
电动卷扬机
ELECTRIC WINCH

Model	H2000
Capacity	2000 lbs
N.W. / G.W.	25kg / 34kg
Package Size	515x330x185mm
QTY / 20' CY	1800 PCS



**H2500
H2500W**
电动卷扬机
ELECTRIC WINCH

Model	H2500	H2500W
Capacity	2500 lbs	2500 lbs
N.W. / G.W.	12.5kg / 21kg	34kg / 34kg
Package Size	515x330x185mm	515x330x185mm
QTY / 20' CY	1700 PCS	1800 PCS



H6000
电动卷扬机
ELECTRIC WINCH

Model	H6000
Capacity	6000 lbs
N.W. / G.W.	25kg / 25kg
Package Size	515x330x185mm
QTY / 20' CY	750 PCS



H8000
电动卷扬机
ELECTRIC WINCH

Model	H8000
Capacity	8000 lbs
N.W. / G.W.	43kg / 43kg
Package Size	610x330x330mm
QTY / 20' CY	550 PCS



H8500
电动卷扬机
ELECTRIC WINCH

Model	H8500
Capacity	8500 lbs
N.W. / G.W.	43kg / 43kg
Package Size	610x330x330mm
QTY / 20' CY	480 PCS



H9500
电动卷扬机
ELECTRIC WINCH

Model	H9500
Capacity	9500 lbs
N.W. / G.W.	43kg / 43kg
Package Size	610x330x330mm
QTY / 20' CY	480 PCS

SEAGULL®

HAND WINCH

海鸥®

HAND WINCH LOAD BINDER



HWG
手摇机
HAND WINCH




HWV
手摇机
HAND WINCH

HAND WINCH FOR USING:
Upgrade a chain hoist, loading and
unloading heavy objects, etc.



	HWG - HAND WINCH					HWV - HAND WINCH		
Model	GB150	GB300	GB500	GB1000	GB2000	VGB250	VGB500	VGB1000
W.M.L (kg)	150	300	500	1000	2000	250	500	1000
For wire rope (mm)	4	5	6.3	8	12	5	6.3	8
Length (m)	22	40	25	35	30	20	25	35
Number of layers	6	6	4	4	3	4	4	4
M.M. (kg)	8	16	17	30	60	10	16	40
Capacity (kg)	150	300	500	1000	2000	250	500	1000
A (mm)	180	240	240	412	500	150	180	300
B (mm)	325	385	385	485	585	300	340	450
C (mm)	150	200	200	300	325	150	180	300
D (mm)	150	200	200	300	400	200	240	300
E (mm)	250	250	250	560	560	240	240	330
F (mm)	540	540	540	840	1340	540	540	840
Drive roller	2.842/3	4.42/1	7.25/1	23.75/1	43.7/1	16.1	20.1	26.1

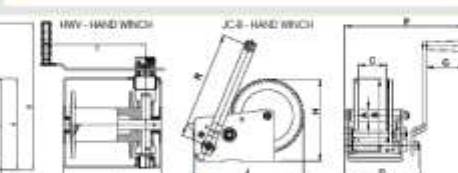

JC-B
手摇机
HAND WINCH
(2000 - 2500LBS)

JC-B
手摇机
HAND WINCH
(600 - 1400LBS)


手动卷扬机 HAND WINCH

Warning: The rated capacity means the max. capacity when
the winch to be worked the full layer of wire rope, and
operation decreased by adding number of layer of wire
rope accordingly.



	JC-C HAND WINCH 手动卷扬机		
Model	1200 lb	1800 lb	2400 lb
Rated capacity (lb)	1200	1800	2400
Test load (kn)	0	10	17.5
Transmission ratio	4.2:1	5.1:1	18:1
Hand operated strength (N)	180	190	180
Dimensions (mm)	A	648	660
	B	6136	6180
	C	51	60
	D	157	181
	E	877	877
	F	273	288
	G	178	178
	H	156	200
Net weight (no wire rope) (kg)	J	164	208
	K	208	319


JC-C
手动卷扬机 (不带绳、钩)
HAND WINCH (no rope, hook)



JC-C
手动卷扬机 (带尼龙绳、钩)
HAND WINCH
(with nylon rope, hook)

JC-C
手动卷扬机 (带钢丝绳、钩)
HAND WINCH (with cable wire, hook)

紧索器 LOAD BINDER

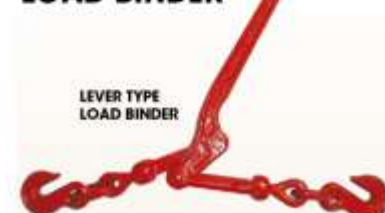

**LEVER TYPE
LOAD BINDER**

**紧索器
LEVER TYPE LOAD BINDER, PAINTED RED**

ART NO.	SIZE	W.L.	PROOF LOAD	ULTIMATE LOAD	N.W.	HANDLE LENGTH	Take Up
	(inch)	(inch)	(lb)	(lb)	(lb)	(inch)	(inch)
MLB0104	1/4x1/4	2000	5200	9200	3.52	17.42	3.75
MLB0516	5/16x3/8	5400	10800	19000	8.37	18.40	4.5
MLB0820	3/8x1/2	9200	18400	25300	12.2	17.54	4.5
MLB1025	1/2x5/8	13000	26000	36000	16.7	21.00	4.75



**RATCHET TYPE
LOAD BINDER**



**紧索器
RATCHET TYPE LOAD BINDER, PAINTED RED**

ART NO.	SIZE	W.L.	PROOF LOAD	ULTIMATE LOAD	N.W.	HANDLE LENGTH
	(inch)	(inch)	(lb)	(lb)	(lb)	(inch)
MRB0104	1/4x1/4	2000	5200	9200	3.52	7.16
MRB0516	5/16x3/8	5400	10800	19000	8.37	12.82
MRB0820	3/8x1/2	9200	18400	25300	12.2	13.02
MRB1025	1/2x5/8	13000	26000	36000	16.7	21.00



牵引机 CABLE PULLER

- Construction
- Automotive
- Farm & ranch
- Home Projects
- Workshop

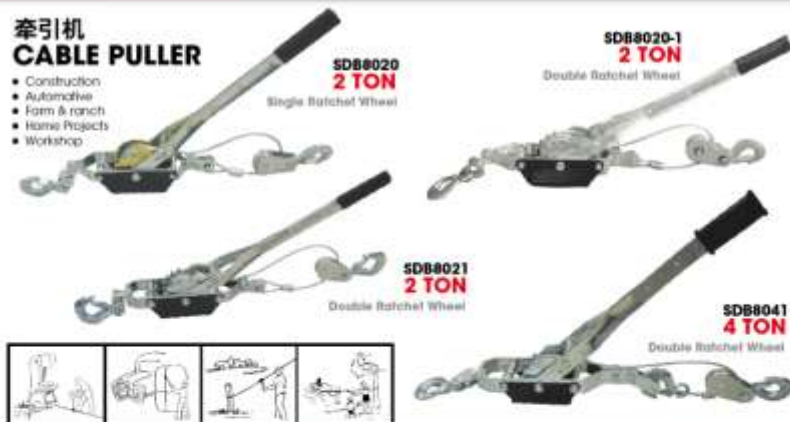

ITEM NO.	CAPACITY (Ton)	DIA. OF STEEL WIRE	PULL OF DRAUGHT	LEVERAGE	PACKAGE SIZE (cm)	G.W. / N.W. (kg)	QTY/CTN (pcs)	QTY/20' CY (pcs)	RATCHET
SDB8020	2	φ4.8	5.0 kN	15:1	60.5x31.5x18	14/14	6	5160	Single Ratchet Wheel
SDB8021	2	φ4.8	5.8 kN	15:1	60.5x31.5x18	17/15	6	5160	Double Ratchet Wheel
SDB8021	2	φ4.8	6.8 kN	15:1	60.5x31.5x18	20/18	6	5160	Double Ratchet Wheel
SDB8041	4	φ5	7.85 kN	15:1	70x28x21	22/20	4	2560	Double Ratchet Wheel

电缆钳 CABLE GRIPS



CABLE GRIPS


ITEM NO.	S.W.L. (kg)	CONDUCTOR DIA. (mm)	N.W. (kg)
B-0500	500	1-10	0.32
B-1000	1000	3.5-16	0.7
B-2000	2000	7-20	1.3
B-3000	3000	16-32	2.6

紧索器 RATCHET PULLER




HAND RATCHET PULLER

ITEM NO.	TRACTOR CAPACITY (KG)	WIRE ROPE SIZE (MM)	N.W. (kg)
HRP010	1000	φ10 x 2500mm	3.75
HRP015	1500	φ8 x 2500	4
HRP020	2000	φ8 x 2500	6



For project ideas and tips
www.seagullhoist.com

农夫顶 FARM JACK

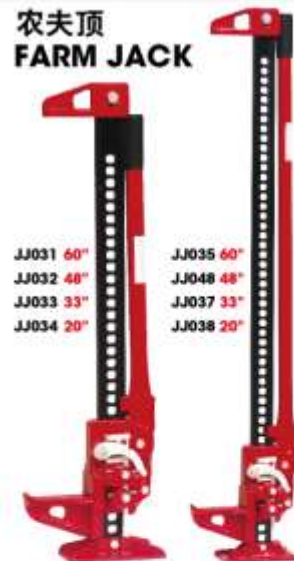

JJ031 60"	JJ035 60"
JJ032 48"	JJ048 48"
JJ033 33"	JJ037 33"
JJ034 20"	JJ038 20"

SAFETY PRECAUTIONS

1. Be sure base of jack is on firm and level ground.
2. Be sure your jack will not slip after load is applied.
3. Be sure lifting arm is fully under load is applied.
4. Be sure the load is stabilized before lifting so that it will not shift when lifting or lowering.
5. Do not walk under vehicle after lifting unless you have jack stands supporting the vehicle.
6. Do not push load off the jack. Lower it carefully.
7. DO NOT use forcible extensions.
8. Do not carry jack by handle.



JJ035 JJ048 JJ037 JJ038

MODEL	SIZE	MIN HEIGHT (mm)	MAX HEIGHT (mm)	N.W. (kg)	PACKAGE SIZE (mm)	QTY/CTN (pcs)	QTY/20' CY (pcs)
JJ035	60" farm jack	103	1392	15	124X34.5X14	1	350
JJ048	48" farm jack	115	1070	14	124X34.5X14	1	670
JJ037	33" farm jack	113	700	13	92X24.5X14	1	950
JJ038	20" farm jack	115	480	12	54X24.5X14	1	1320

JJ031 JJ032 JJ033 JJ034

MODEL	SIZE	MIN HEIGHT (mm)	MAX HEIGHT (mm)	N.W. (kg)	PACKAGE SIZE (mm)	QTY/CTN (pcs)	QTY/20' CY (pcs)
JJ031	60" farm jack	103	1392	15	124X34.5X14	1	350
JJ032	48" farm jack	115	1070	14	124X34.5X14	1	670
JJ033	33" farm jack	113	700	13	92X24.5X14	1	950
JJ034	20" farm jack	115	480	12	54X24.5X14	1	1320

支架 JACK STANDS



- Solid steel handle, self-locking ratchet
- Large saddle, unified frame construction
- Ductile iron cast

MODEL	CAPACITY (Ton)	MIN HEIGHT (mm)	MAX HEIGHT (mm)	N.W. (kg)	PACKAGE SIZE (mm)	QTY/CTN (pcs)	QTY/20' CY (pcs)
J-028	2	215	375	5	61X25X32	5 PCS	2750
J-016	3	267	430	6.7	22X29X34.5	1 PC	1800
J-011	4	345	524	8	28X32X42.5	1 PC	1150
J-015	6	417	612	11.3	30.5X35.5X46.5	1 PC	750
J-014	12	498	750	26	35X32X58	1 PC	430

Large area feet to resist sinking into asphalt


For project ideas and tips
www.seagullhoist.com

千斤顶 MECHANICAL JACK

1.5 TON - 25 TON




Mechanical jack is a widely used in automobile manufacturing, casting machinery, transportation equipment, such as for lifting equipment, machinery products supported. Mechanical jack high quality, good quality, safe, simple, convenient.



MODEL	1.5t	3t	6t	10t	16t	20t	25t
RATED CAPACITY (t)	1.5	3	6	10	16	20	25
TEST LOAD (kn)	16.4	36.8	61.5	122.5	196	245	306.3
CHAIN SHAKE TO LIFT FULL LOAD (N)	150	280	280	560	640	640	640
STROKE (mm)	300	350	350	410	320	320	320
MIN. LIFTING HEIGHT (mm)	60	70	80	85	95	100	110
HEIGHT (mm)	600	730	730	830	800	860	970
A	163	197	199	250	275	275	300
B	180	200	239	265	320	320	340
C	273	294	305	408	514	520	558
D	100	130	140	140	150	150	170
E	50	60	71	80	78	78	80
G	110	140	170	170	180	180	200
H	113	127	127	248	250	250	250
NET WEIGHT (kg)	13.5	23.2	28.5	66.8	65	75	97

BEAM CLAMP 夹持器

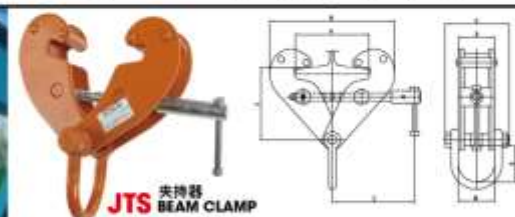

JTS 夹持器 BEAM CLAMP

SAFT WORKING LOAD (%)	ADJUSTABLE BEAM (mm)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	AA	AB	AC	AD	AE	AF	AG	AH	AI	AJ	AK	AL	AM	AN	AO	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY	AZ	BA	BB	BC	BD	BE	BF	BG	BH	BI	BJ	BK	BL	BM	BN	BO	BP	BQ	BR	BS	BT	BU	BV	BW	BX	BY	BZ	CA	CB	CC	CD	CE	CF	CG	CH	CI	CJ	CK	CL	CM	CN	CO	CP	CQ	CR	CS	CT	CU	CV	CW	CX	CY	CZ	DA	DB	DC	DD	DE	DF	DG	DH	DI	DJ	DK	DL	DM	DN	DO	DP	DQ	DR	DS	DT	DU	DV	DW	DX	DY	DZ	EA	EB	EC	ED	EE	EF	EG	EH	EI	EJ	EK	EL	EM	EN	EO	EP	EQ	ER	ES	ET	EU	EV	EW	EX	EY	EZ	FA	FB	FC	FD	FE	FF	FG	FH	FI	FJ	FK	FL	FM	FN	FO	FP	FQ	FR	FS	FT	FU	FV	FW	FX	FY	FZ	GA	GB	GC	GD	GE	GF	GG	GH	GI	GJ	GK	GL	GM	GN	GO	GP	GQ	GR	GS	GT	GU	GV	GW	GX	GY	GZ	HA	HB	HC	HD	HE	HF	HG	HH	HI	HJ	HK	HL	HM	HN	HO	HP	HQ	HR	HS	HT	HU	HV	HW	HX	HY	HZ	IA	IB	IC	ID	IE	IF	IG	IH	II	IJ	IK	IL	IM	IN	IO	IP	IQ	IR	IS	IT	IU	IV	IW	IX	IY	IZ	JA	JB	JC	JD	JE	JF	JG	JH	JI	IJ	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	MA	MB	MC	MD	ME	MF	MG	MH	MI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	NA	NB	NC	ND	NE	NF	NG	NH	NI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	OA	OB	OC	OD	OE	OF	OG	OH	OI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	PA	PB	PC	PD	PE	PF	PG	PH	PI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	QA	QB	QC	QD	QE	QF	QG	QH	QI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	RA	RB	RC	RD	RE	RF	RG	RH	RI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	SA	SB	SC	SD	SE	SF	SG	SH	SI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	TA	TB	TC	TD	TE	TF	TG	TH	TI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	UA	UB	UC	UD	UE	UF	UG	UH	UI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	VA	VB	VC	VD	VE	VF	VG	VH	VI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	WA	WB	WC	WD	WE	WF	WG	WH	WI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	XA	XB	XC	XD	XE	XF	XG	XH	XI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	YA	YB	YC	YD	YE	YF	YG	YH	YI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	ZA	ZB	ZC	ZD	ZE	ZF	ZG	ZH	ZI	II	JK	KL	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ
1	75-545	203	183	375	144	96	84	270	322	146	91																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							</																																																																																									


JT 夹持器 BEAM CLAMP

SAFT WORKING ADJUSTABLE		A	B	C	D	E	F	G	H	NET WEIGHT	
LOAD (t)	RAM (mm)	MAX	MIN	MAX	(mm)	MIN	MAX	MIN	MAX	(kg)	
1	75-220	260	180	360	65	5	210	121	115	25 22	0.5
2	75-220	260	180	360	74	6	210	132	116	25 22	0.2
3	80-320	354	235	490	105	8	240	142	225	45 38	10.8
4	80-320	354	235	490	110	10	240	145	225	45 38	11.1
10	80-320	365	320	505	120	12	260	170	230	50 40	20.1

Heavy-duty snatch block withstands the abuse of regular testing. Quick-pull pin enables easy cable loading.



LH TYPES HEAVY DUTY SNATCH BLOCKS





- Capacity from 2t to 50t
- Durable powder coat finish
- Shocke type and hook type are available
- Heavy-duty permits to perform under extreme condition
- Forged spine parts enhance the quality

耐扣强度力量型滑车 HEAVY DUTY SNATCH BLOCKS LS

TYPE SNATCHES	S.W.L (t)	S.W.L SHEAVE DIA (mm)	A2 (mm)	B (mm)	C (mm)	FOR WIRE DIA (mm)	H.W. (kg)
LS27X1	2	75	268	62	70	7.0	3.8
LS40/20X1	4	116	345	120	70	10.12	8.2
LS67X1	6	130	390	140	70	16.18	8.3
LS87X1	8	136	415	140	95	20.22	14.1
LS97X1	9	200	528	210	95	20.22	18.7
LS107X1	10	200	540	210	102	22.04	33
LS127X1	12	250	679	260	115	24.26	34.7
LS137X1	13	250	679	260	115	24.26	34.7
LS147X1	14	250	679	260	115	24.26	34.7
LS167X1	16	250	679	260	115	24.26	34.7
LS187X1	18	250	679	260	115	24.26	34.7
LS207X1	20	250	679	260	115	24.26	34.7
LS227X1	22	250	679	260	115	24.26	34.7
LS247X1	24	250	679	260	115	24.26	34.7
LS267X1	26	250	679	260	115	24.26	34.7
LS287X1	28	250	679	260	115	24.26	34.7
LS307X1	30	250	679	260	115	24.26	34.7
LS327X1	32	250	679	260	115	24.26	34.7
LS347X1	34	250	679	260	115	24.26	34.7
LS367X1	36	250	679	260	115	24.26	34.7
LS387X1	38	250	679	260	115	24.26	34.7
LS407X1	40	250	679	260	115	24.26	34.7
LS427X1	42	250	679	260	115	24.26	34.7
LS447X1	44	250	679	260	115	24.26	34.7
LS467X1	46	250	679	260	115	24.26	34.7
LS487X1	48	250	679	260	115	24.26	34.7
LS507X1	50	250	679	260	115	24.26	34.7


LS TYPES HEAVY DUTY SNATCH BLOCKS





B 指開滑車
B DRAWING BLOCKS

TYPE	S.W.L. (T)	N.W. (kg)	FOR WIRE DIA. (mm)
B-75	0.5	1.2	8
B-100	1	2.4	10

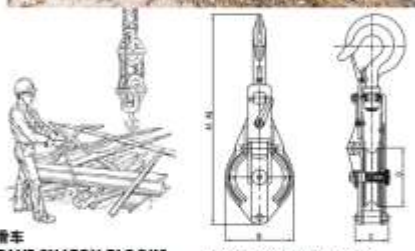

DY


單輪較接式滑車
SINGLE SHEAVE SNATCH BLOCKS

TYPE	HOOK	EYE	S.W.L. (T)	SHEAVE DIA. D (mm)	DIMENSIONS (mm)	FOR WIRE DIA. (mm)	N.W. (kg)
					HOOK A1 EYE A2 B C		
75DYN15	75DYN150	0.5	75	386	227 87 50	8	1.6
100DYN15	100DYN150	1	100	311.5	112 55.5	10	3.5
125DYN15	125DYN150	1.5	125	370	344 140 65.5	12	4.8
150DYN15	150DYN150	2	150	440.5	417 168 90.1	14	7.7
180DYN15	180DYN150	3	180	498	478 204 107	16	11
200DYN15	200DYN150	4	200	560.5	556 226 128	20	19.5
250DYN15	250DYN150	6	250	690.5	661 276 147	25	33.8
300DYN15	300DYN150	6	300	790	775 330 162	26	41
350DYN15	350DYN150	10	350	934	896 395 178	28	66

DY


雙輪較接式滑車
DOUBLE SHEAVE SNATCH BLOCKS

TYPE	HOOK	EYE	S.W.L. (T)	SHEAVE DIA. D (mm)	DIMENSIONS (mm)	FOR WIRE DIA. (mm)	N.W. (kg)
					HOOK A1 EYE A2 B C		
75DYN25	75DYN250	0.5	75	386	227 87 77	8	2.6
100DYN25	100DYN250	1	100	311.5	284.5 112 88	10	4.3
125DYN25	125DYN250	1.5	125	370	344 140 100	12	7.8
150DYN25	150DYN250	2	150	440.5	417 168 146	16	12.2
180DYN25	180DYN250	3	180	498	478 204 157	19	18.5
200DYN25	200DYN250	4	200	560.5	556 226 188	22	31
250DYN25	250DYN250	6	250	706.5	661 276 220	25	49.8
300DYN25	300DYN250	6	300	795	775 330 238	26	72
350DYN25	350DYN250	10	350	934	896 395 260	28	102



DOUBLE SHEAVE SNATCH BLOCKS


For project ideas and tips
www.seagullhoist.com



強力鋼索專滑車 **WIRE ROPE SNATCH BLOCKS**

TYPE	HOOK	EYE	S.W.L. (T)	SHEAVE DIA. D (mm)	DIMENSIONS (mm)	FOR WIRE DIA. (mm)	N.W. (kg)
					HOOK A1 EYE A2 B C		
18-63H	18-63H	0.25	63	208.4	202.4 68 40	6	10
18-75H	18-75H	0.25	75	222.4	216.4 80 40	8	12
18-100H	18-100H	0.5	100	300.5	283.5 106 48.5	8	16
18-125H	18-125H	1	125	346	332.5 140 53.5	10	20
18-150H	18-150H	1	150	382	378.5 148 62	12	24
18-180H	18-180H	1.5	180	456.7	450 204 81	16	30
18-200H	18-200H	2	200	505.8	498 220 91.5	16	32
18-250H	18-250H	3	250	642.7	627 246 114	20	40
25-63H	25-63H	0.25	63	208.4	202.4 68 40	6	10
25-75H	25-75H	0.25	75	222.4	216.4 80 40	8	12
25-100H	25-100H	0.75	100	315.4	285 108 76	8	16
25-125H	25-125H	1	125	346	332.5 140 86	10	20
25-150H	25-150H	1.5	150	412.7	400 146 96	12	24
25-180H	25-180H	2	180	489.8	482 204 125	15	30
25-200H	25-200H	3	200	522.8	504 220 144	16	32
25-250H	25-250H	4	250	663	650 246 180	20	40
38-63H	38-63H	0.25	63	208.4	202.4 68 40	6	10
38-75H	38-75H	0.25	75	222.4	216.4 80 40	8	12
38-100H	38-100H	0.75	100	315.4	285 108 104	8	16
38-125H	38-125H	1	125	346	332.5 140 119	10	20
38-150H	38-150H	1.5	150	412.7	400 146 130	12	24
38-180H	38-180H	2	180	489.8	482 204 146	15	30
38-200H	38-200H	3	200	545.2	528.5 220 194	16	32
38-250H	38-250H	5	250	688.5	671 246 200	20	40
15-63H	15-63H	0.25	63	208.4	202.4 68 40	6	10
15-75H	15-75H	0.25	75	222.4	216.4 80 40	8	12
15-100H	15-100H	0.5	100	300.5	283.5 106 58.5	8	16
15-125H	15-125H	1	125	346	332.5 140 62.5	10	20
15-150H	15-150H	1	150	382	378.5 146 70	12	24
15-180H	15-180H	1.5	180	456.7	450 204 81	15	30
15-200H	15-200H	2	200	505.8	498 220 91.5	16	32
15-250H	15-250H	3.5	250	642.7	627 246 114	20	40

馬鐵滑車 **M.I. BLOCKS**



TYPE	S.W.L. (kg)	DIMENSIONS (mm)	FOR WIRE DIA. (mm)	N.W. (kg)
		HOOK A1 EYE A2 B C		
3"x1	2 (0.2)	203 144 67 39	12	0.9
4"x1	4 (0.4)	242 170 76 46	16	1.2
5"x1	5 (0.5)	278 170 92 49	18	2
6"x1	10 (1)	346 330 112 60	24	3.5
7"x1	11 (1.1)	368 330 112 64	28	5.1
8"x1	13 (1.3)	415 390 143 68	30	7.6
9"x1	18 (1.8)	490 420 180 75	32	11.4
10"x1	18 (1.8)	492 440 200 75	36	13.4

TYPE	S.W.L. (kg)	DIMENSIONS (mm)	FOR WIRE DIA. (mm)	N.W. (kg)
		HOOK A1 EYE A2 B C		
1"x1	4 (0.4)	203 144 67 39	12	1.9
4"x1	9 (0.9)	242 170 76 46	16	2.1
5"x1	11 (1.1)	260 170 92 74	18	3
6"x1	20 (2)	346 330 112 100	24	6.2
7"x1	23 (2.3)	368 330 112 101	28	7.6
8"x1	35 (3.5)	415 390 143 111	30	11.3
9"x1	30 (3)	450 420 180 123	32	16.4
10"x1	30 (3)	492 440 200 117	34	19.2
11"x1	18 (1.8)	262 232 76 62	16	2.6
12"x1	15 (1.5)	280 272 92 100	18	4


For project ideas and tips
www.seagullhoist.com



DHC

单轮船用开口导向滑车 SINGLE MARINE SNATCH GUIDE BLOCKS

TYPE	DHC3x1KBL	DHC5x1KBL
S.W.L. KN(T)	30 (3)	50 (5)
T.L. KN(T)	90 (9)	150 (15)
DIMENSIONS (mm) A	413	437
B	140	162
C	84	99
M.W. (kg)	10	12
FOR WIRE DIA (mm)	18-20	20-22

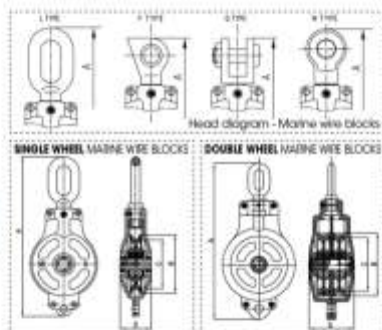

HC 单轮船用钢索滑车 SINGLE WHEEL MARINE WIRE BLOCKS

TYPE	S.W.L. KN(T)	T.L. KN(T)	FOR WIRE DIA (mm)	L type	H type	Y type	G type	B	C	D	L type	H type	Y type	G type	M.W. (kg)
6HC 2x1	20 (2)	60 (6)	15-12	429	384	384	401	156	132	100	11	11	11	11	12.5
8HC 3x1	30 (3)	120 (12)	16-20	528	482	482	501	196	164	124	20	20	20	20	32
10HC 3x1	30 (3)	120 (12)	16-20	658	601	601	621	240	204	124	27	27	27	27	30
12HC 5x1	50 (5)	200 (20)	20-22	645	643	643	658	300	260	134	40	40	40	40	44
14HC 5x1	50 (5)	200 (20)	20-24	796	737	737	750	340	300	151	55	55	55	55	59
16HC 10x1	100 (10)	400 (40)	24-26	945	881	881	897	406	356	190	100	100	100	100	110
17HC 16x1	160 (16)	640 (64)	26-28	1018	948	948	968	430	378	192	125	125	125	125	132
18HC 20x1	200 (20)	800 (80)	26-28	1095	1035	1035	1055	460	410	210	150	150	150	150	172

HC 双轮船用钢索滑车 DOUBLE WHEEL MARINE WIRE BLOCKS

TYPE	S.W.L. KN(T)	T.L. KN(T)	FOR WIRE DIA (mm)	L type	H type	Y type	G type	B	C	D	L type	H type	Y type	G type	M.W. (kg)
6HC 2x2	30 (3)	100 (10)	16-20	562	498	498	517	196	164	124	30	30	30	30	32
8HC 2x2	30 (3)	120 (12)	16-20	642	600	600	615	260	224	180	30	30	30	30	35
12HC 10x2	100 (10)	400 (40)	20-22	730	680	680	698	300	260	134	70	70	70	70	74
14HC 16x2	160 (16)	640 (64)	24-26	840	773	773	790	340	295	150	110	110	110	110	118
16HC 20x2	200 (20)	800 (80)	24-26	1035	945	945	965	410	358	192	140	140	140	140	157
17HC 25x2	250 (25)	1000 (100)	26-28	1074	1010	1010	1035	430	378	192	150	150	150	150	165
18HC 32x2	320 (32)	1280 (128)	26-28	1174	1090	1090	1120	460	410	210	160	160	160	160	172



YB 船用吊环钢索滑车 MARINE EYE WIRE BLOCKS


TYPE	SHEAVE DIA (mm)	S.W.L. (T)	DIMENSIONS (mm) A B C D	N.W. (kg)	FOR WIRE DIA (mm)
YB75x1	75	0.5	178 85 26 12	1.1	8
YB100x1	100	1	235 121 34 16	1.8	8
YB125x1	125	1.5	305 145 38 18	3.5	9
YB150x1	150	2	350 160 41 22	6.1	12
YB200x1	200	4	425 225 46 28	11.5	16
YB250x1	250	5	495 275 50 28	17	22
YB75x2	75	0.5	178 85 30 12	1.8	8
YB100x2	100	1	235 121 35 16	2.8	8
YB125x2	125	1.5	305 145 39 18	5.5	9
YB150x2	150	2	350 160 43 22	8.5	12
YB200x2	200	4	425 225 49 28	16.5	16
YB250x2	250	5	495 275 115 28	26.5	22

YBO 船用吊环钢索滑车 MARINE EYE WIRE BLOCKS

TYPE	SHEAVE DIA (mm)	S.W.L. (T)	DIMENSIONS (mm) A B C D	N.W. (kg)	FOR WIRE DIA (mm)
YBO75x1	75	0.5	230 85 26 12	1.5	8
YBO100x1	100	1	295 121 34 16	2.4	8
YBO125x1	125	1.5	345 145 38 18	4.2	9
YBO150x1	150	2	415 160 41 22	6.4	12
YBO200x1	200	4	517 225 46 28	12.5	16
YBO250x1	250	5	595 275 50 28	16	22
YBO75x2	75	0.5	230 85 30 12	2.1	8
YBO100x2	100	1	285 121 35 16	3	8
YBO125x2	125	1.5	355 145 39 18	5.9	9
YBO150x2	150	2	365 160 43 22	8	12
YBO200x2	200	4	517 225 49 28	17.5	16
YBO250x2	250	5	600 275 115 28	28.5	22

DU 角轮组件 PULLEY BLOCK

WHL (kg)	MODEL	WEIGHT (T)	DIMENSIONS (mm) A B C D E F G H K L M
600	7312	1.5	120 80 78 100 90 30 8 60 10 7
1000	7314	2.4	140 80 98 125 110 35 10 77 12 6
2000	7316	4.5	160 80 115 150 140 40 12 92 14 10
3000	7317	8.2	220 100 160 200 180 50 15 120 18 12
6000	7319	18.0	320 120 225 275 260 60 20 160 23 15

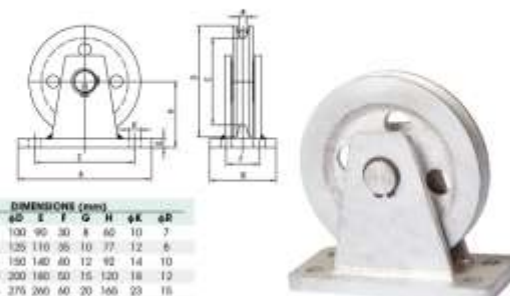

A 系列起重滑车 A SERIES LIFTING BLOCK

TYPE	S.W.L (kN)(T)	T.L (kN)(T)	FOR WIRE DIA. (mm)	WEIGHT (kg)	1A TYPE J6 F-2002
1A 220	14 (3.02)	56 (5.4)	12.5	16	
1A 240	17.5 (3.70)	70 (7.0)	14	21	
1A 280	22.5 (3.25)	90 (9.0)	16	33	
1A 340	35 (3.90)	140 (14.0)	20	52	
1A 420	50 (5.00)	200 (20.0)	25	66	
1A 480	55 (5.50)	220 (22.0)	25	84	
2A 240	40 (4.00)	240 (24.0)	20	104	
2A 280	70 (7.00)	280 (28.0)	25	123	
2A 340	45 (4.50)	130 (13.0)	14	47	
2A 410	56 (5.60)	190 (19.0)	16	57.5	
2A 430	130 (13.00)	340 (34.0)	20	114	
2A 460	190 (19.00)	380 (38.0)	20	160	
2A 480	210 (21.00)	420 (42.0)	25	206	
2A 540	230 (23.00)	460 (46.0)	25	256	
2A 630	280 (28.00)	520 (52.0)	25	316	
2A 680	350 (35.00)	600 (60.0)	25	382	
2A 740	420 (42.00)	700 (70.0)	25	490	

LIFTING BLOCKS USING:
For lifting lower, overhead line, string
equipment and low working, etc.




B 系列起重滑车 B SERIES LIFTING BLOCK

TYPE	S.W.L (kN)(T)	T.L (kN)(T)	FOR WIRE DIA. (mm)	WEIGHT (kg)	1B TYPE J6 F-3421
1B 220	15 (1.4)	60 (6.0)	12.5	29	
1B 240	20 (2.0)	100 (10.0)	14	39	
1B 280	30 (3.0)	150 (15.0)	16	45	
1B 340	50 (5.00)	210 (21.0)	20	73	
1B 420	70 (7.0)	330 (33.0)	25	126	
1B 480	100 (10.0)	420 (42.0)	25	188	
2B 240	80 (8.0)	160 (16.0)	14	59	
2B 280	100 (10.0)	220 (22.0)	16	79	
2B 340	140 (14.0)	320 (32.0)	20	158	
2B 410	220 (22.0)	430 (43.0)	20	215	
2B 430	290 (29.0)	470 (47.0)	25	292	
2B 460	360 (36.0)	500 (50.0)	25	326	
2B 480	340 (34.0)	600 (60.0)	25	391	
2B 540	390 (39.0)	660 (66.0)	22	391	
2B 630	380 (38.0)	640 (64.0)	25	416	
2B 680	450 (45.0)	670 (67.0)	25	528	
2B 740	550 (55.0)	750 (75.0)	25	527	
2B 880	650 (65.0)	767 (76.7)	25	615	

ZHC 系列船用起重吊钩滑车 SERIES MARINE-CARGO LIFTING HOOK BLOCKS

TYPE	S.W.L (kN)(T)	T.L (kN)(T)	FOR WIRE DIA. (mm)	SIZE (mm)	A	B	C	D	WEIGHT (kg)
14-ZHC2000000000	200 (20)	400 (40)	25-28	1570	1445	450	410	471	314 (310)
20-ZHC2000000000	200 (20)	400 (40)	25-28	1550	1525	350	430	471	314 (310)
22-ZHC2000000000	200 (20)	400 (40)	25-30	1700	1675	550	470	471	574 (567)
24-ZHC2000000000	200 (20)	400 (40)	25-30	1945	1815	550	470	425	525 (520)
24-ZHC2000000000	250 (25)	500 (50)	25-30	1875	1760	600	510	570	513 (510)
24-ZHC2000000000	320 (32)	640 (64)	25-30	2005	1875	600	510	525	807 (810)
24-ZHC2000000000	400 (40)	800 (80)	25-30	2140	1990	600	510	495	754 (742)
16-ZHC2000000000	200 (20)	400 (40)	24-26	1505	1400	400	350	471	320 (320)
18-ZHC2000000000	250 (25)	500 (50)	25-28	1690	1580	450	410	570	480 (480)
22-ZHC2000000000	320 (32)	640 (64)	25-30	1925	1805	550	470	425	705 (710)
24-ZHC2000000000	500 (50)	810 (81)	25-30	2215	209	600	510	780	1146 (1146)



G-80 美式强力环 U.S. TYPE FORGED MASTER LINK

ITEM NO.	WEIGHT (kg)	WLL (T)	S.L (T)	DIMENSIONS (mm)	A	B	C
8-G-2001-1/2	0.5	2.2	11	127	43.5	13	
8-G-2001-3/8	0.96	3	15	152	76	16	
8-G-2001-1/4	1.2	4.7	23.5	140	70	19	
8-G-2001-7/8	1.8	6.5	32.5	160	90	22	
8-G-2001-1	2.5	11	55	178	89	25	
8-G-2001-1-1/8	5.2	14	80	222	111	32	
8-G-2001-1-1/2	9	21.7	108.5	267	132.5	38	
8-G-2001-1-3/4	13.8	28.4	142	305	152.5	45	
8-G-2001-2	19.8	44.3	222	355.5	178	51	
8-G-2001-2-1/8	29.5	58	325	406	203	57	
8-G-2001-2-1/2	37.2	66.8	334	406	203	63	
8-G-2001-2-3/4	48	98	490	406	240	70	



G-80 散式子母环 WELDED MASTER LINK ASSEMBLY WITH FLAT EUROPEAN TYPE

ITEM NO.	WEIGHT (kg)	WLL (T)	S.L (T)	DIMENSIONS (mm)	A	B	C
8-G-2003-06	1.43	3.15	12.6	135	75	18	
8-G-2003-7/8	2.6	6.3	21.2	160	90	22	
8-G-2003-10	4.1	9	32	180	100	26	
8-G-2003-13	7.8	10	40	200	110	32	
8-G-2003-16	11.9	15	60	240	140	36	
8-G-2003-20	22.8	21.2	84.8	340	180	45	
8-G-2003-22	27.6	31.5	126	340	180	50	
8-G-2003-26	40.8	40	160	400	200	56	
8-G-2003-32	57	50	200	430	220	63	
8-G-2003-36	80.5	63	252	460	250	72	



G-80 散式强力环 WELDED MASTER LINK WITH FLAT EUROPEAN TYPE

ITEM NO.	WEIGHT (kg)	WLL (T)	S.L (T)	DIMENSIONS (mm)	A	B	C
8-G-2003-06	0.48	1.1	4.4	110	60	16	
8-G-2003-07	0.65	2	8	110	60	16	
8-G-2003-08	0.99	3.15	12.6	135	75	18	
8-G-2003-10	1.8	5.3	21.2	160	90	22	
8-G-2003-13	3.4	8	32	180	100	26	
8-G-2003-16	4.7	10	40	200	110	32	
8-G-2003-20	8	15	60	240	140	36	
8-G-2003-22	11.8	17	66	300	160	40	
8-G-2003-26	15.4	21.2	84.8	340	180	45	
8-G-2003-32	21	31.5	126	360	190	50	
8-G-2003-36	29	40	160	400	200	56	
8-G-2003-40	38.4	50	200	430	220	63	
8-G-2003-72	95.2	63	252	460	250	72	



梨型环 FORGED PEAR LINK

ITEM NO.	WEIGHT (kg)	WLL (kN)	S.L (kN)	DIMENSIONS (mm)	A	B	C
8-G-2004-1/2	0.25	7000	30000	25.4	13.7	101.6	
8-G-2004-3/8	0.5	9000	40000	31.8	16	127	
8-G-2004-1/4	0.8	12000	60000	38.1	19.1	152.5	
8-G-2004-7/8	1.3	14000	70000	44.5	22.2	178	
8-G-2004-1	1.92	20500	120000	50.8	25.4	203.2	
8-G-2004-1-1/8	2.9	30400	150000	57.1	28.4	222.2	
8-G-2004-1-1/4	3.75	36000	180000	63.5	31.75	254	
8-G-2004-1-3/8	5.12	43000	210000	70	35	280	
8-G-2004-1-1/2	6.5	54300	270000	76.2	37.1	304.8	



新扣 SHACKLE

SIZE (inch)	WLL (Ton)	PRD DIA (mm)	LL (inch)	LW (inch)	G2130	G2150	WEIGHT (Lbs)
3/16	1/3	0.25	0.68	0.60	0.38	0.06	/
1/8	1/2	0.31	1.13	0.78	0.47	0.17	0.13
5/16	3/4	0.39	1.22	0.84	0.53	0.22	0.23
3/8	1	0.44	1.44	1.03	0.66	0.33	0.33
7/16	1-1/2	0.60	1.49	1.16	0.75	0.49	0.49
1/2	2	0.63	1.88	1.31	0.91	0.79	0.75
5/8	3-1/4	0.75	2.38	1.49	1.06	1.68	1.47
3/4	4-3/4	0.86	2.81	3.00	1.25	2.72	2.58
7/8	6-1/2	1.00	3.53	3.28	1.44	3.95	3.55
1	8-1/2	1.13	3.75	3.49	1.49	6.12	5.55
1-1/8	9-1/2	1.26	4.25	2.91	1.81	6.27	7.40
1-1/4	12	1.39	4.68	3.25	2.03	11.71	10.81
1-3/8	13-1/2	1.50	5.25	3.58	2.25	15.83	13.75
1-1/2	17	1.63	5.75	3.88	2.38	30.80	18.50
1-3/4	25	2.00	7.00	5.00	2.88	33.91	31.40
2	35	2.25	7.75	5.75	3.25	52.25	46.75
2-1/2	55	2.75	10.50	7.25	4.13	98.25	85.00
3	85	3.25	13.00	7.88	5.00	154.00	124.25
3-1/2	120	3.75	14.16	9.00	5.25	265.00	/
4	160	4.25	14.00	10.00	5.50	336.00	/

SHACKLE



G-80 EUROPEAN TYPE CONNECTING LINK



G-80 欧式连接环扣 EUROPEAN TYPE CONNECTING LINK

ITEM NO.	WEIGHT (kg)	WLL (T)	S.L. (T)	DIMENSIONS (mm)					
				A	L	K	H	T	B
G-80074-06	0.17	1.2	4.8	16.2	58	42	7		
G-80074-7/8	0.24	2	8	20.5	75	57	8.5		
G-80074-10	0.45	3.2	12.8	26	89	68	10.8		
G-80074-13	0.91	5.4	21.6	30	116	85	15		
G-80074-16	1.3	8.2	32.8	36.3	144	105	19.8		
G-80074-20	2.1	12.8	50	44	170	120	24		
G-80074-22	3.6	16	64	51	192	137	26		
G-80074-26	5.4	20.6	88	58	220	157	30		
G-80074-32	10.8	10.8	128	67.5	281	203	37		

G-80 小眼清钩 FOUNDRY EYE HOOK



G-80 小眼清钩 FOUNDRY EYE HOOK

ITEM NO.	SIZE (mm)	WEIGHT (kg)	WLL (T)	DIMENSIONS (mm)							
				A	D	P	K	H	T		
GL8015-01	7/8-8	1.09	2	16	12	63.5	120	31	25		
GL8015-02	10-6	1.95	3.2	19	16	76	146	33	32		
GL8015-03	13-8	3.22	5.3	25	19	89	175	44.5	38		
GL8015-04	16-8	5.26	8	31.5	20	101	208	51.5	46		
GL8015-05	18/20-8	9.07	12.5	38	25	114	235	65	56		
GL8015-06	22-8	11.79	15	44	26.5	127	264	68.5	57		

G-80 欧式旋转安全钩 EUROPEAN TYPE SWIVEL SELF-LOCKING HOOK



G-80 欧式旋转安全钩 EUROPEAN TYPE SWIVEL SELF-LOCKING HOOK

ITEM NO.	SIZE (mm)	WEIGHT (kg)	WLL (T)	DIMENSIONS (mm)							
				A	B	P	H	K	D		
GL8006-01	6-8	0.70	1.2	32	23	27.5	20.5	149	12		
GL8006-02	7/8-8	1.21	2	34.5	29	30	25	187	125		
GL8006-03	10-8	2.00	3.2	42	37	43	31	223	155		
GL8006-04	13-8	3.50	5.4	49	41	51	42	268	17		
GL8006-05	16-8	7.10	8	61	54	62	53	330	22		
GL8006-06	18/20-8	12.00	12.5	72	70	88	58	365	24		

G-80

欧式眼型安全钩 EUROPEAN TYPE EYE SELF-LOCKING HOOK




G-80 欧式眼型安全钩 EUROPEAN TYPE EYE SELF-LOCKING HOOK

ITEM NO.	SIZE (mm)	WEIGHT (kg)	WLL (T)	DIMENSIONS (mm)							
				A	P	H	K	D	F		
GL8003-01	4-6	0.5	1.2	21	7.5	20.5	110	11	16.5		
GL8003-02	7/8-8	0.8	2	24	35	25	130	13	20		
GL8003-03	10-8	1.52	3.2	30	43	31	172	16	27		
GL8003-04	13-8	2.9	5.3	40	51	42	207	20	32		
GL8003-05	16-8	6.0	8	40	82	53	250	23	46		
GL8003-06	18/20-8	7.15	12.5	63	88	56	270	28	47		
GL8003-07	22-8	14.00	15	70	88	64	320	29	48		

G-80

眼型吊钩 EYE SLING HOOK WITH LATCH



G-80 眼型吊钩 EYE SLING HOOK WITH LATCH

ITEM NO.	SIZE (mm)	WEIGHT (kg)	WLL (T)	DIMENSIONS (mm)							
				A	K	H	T	P	D		
GL8007-01	6-8	0.35	1.2	20	80	10	14.5	25.5	9		
GL8007-02	7/8-8	0.54	2	26	98	24	19.5	30	11		
GL8007-03	10-8	1.1	3.2	38	120	32	20	34	15		
GL8007-04	13-8	2.1	5.3	45	152	42	31	39	19		
GL8007-05	16-8	3.4	8	50	185	48	38	49	23		
GL8007-06	18/20-8	6.35	12.5	62	217	58	52	44	24		

G-80

半角吊钩 EYE SLING HOOK WITH LATCH




G-80 半角吊钩 EYE SLING HOOK WITH LATCH

ITEM NO.	SIZE (mm)	WEIGHT (kg)	WLL (T)	DIMENSIONS (mm)							
				A	K	H	T	P	D		
GL8009-01	6-8	0.40	1.2	75	22	15.5	23.5				
GL8009-02	7/8-8	0.55	2	85	32	19	25				
GL8009-03	10-8	0.9	3.2	104	35	25.5	34				
GL8009-04	13-8	1.6	5.3	128	42	29.5	40				
GL8009-05	16-8	4.1	8	150	52	37.5	45				
GL8009-06	18/20-8	6.95	12.5	180	55	51	48				

G-80

眼型带锁扣钩 EYE SHORTENING GRAB HOOK




G-80 眼型带锁扣钩 EYE SHORTENING GRAB HOOK

ITEM NO.	SIZE (mm)	WEIGHT (kg)	WLL (T)	DIMENSIONS (mm)							
				A	K	P	H	T	D		
GL8009-01	6-8	0.14	2.2	13	75	4.5	8	20			
GL8009-02	7/8-8	0.27	2	16.5	87	10	9	26			
GL8009-03	10-8	0.70	3.2	20	120	13	14.5	47			
GL8009-04	13-8	1.4	5.3	26	155	15	17	58			
GL8009-05	16-8	2.7	8	29	168	17.5	22	71			
GL8009-06	18/20-8	4.00	12.5	35	199	22	25	98			
GL8009-07	22-8	8.46	15	43	172	24	26	110			

G-80

半角带锁扣钩 CLEVIS SHORTENING GRAB HOOK



G-80 半角带锁扣钩 CLEVIS SHORTENING GRAB HOOK

ITEM NO.	SIZE (mm)	WEIGHT (kg)	WLL (T)	DIMENSIONS (mm)							
				A	K	P	H	T	D		
GL8010-01	6-8	0.18	1.2	6.7	42	8	24	16.5			
GL8010-02	7/8-8	0.31	2	9	50	10	30	34			
GL8010-03	10-8	0.90	3.2	13	72	13	44	33			
GL8010-04	13-8	1.60	5.3	17	88	17	53	40			
GL8010-05	16-8	2.80	8	21	102	20	64	45			
GL8010-06	18/20-8	4.25	12.5	24	117	24	86	55			
GL8010-07	22-8	6.60	15	26	139	26	98	62			

LIFTING CHAIN (EN1818-2, DIN5687-80)

SIZE (mm)	DEVIATION (mm)	PITCH (mm)	DEVIATION (mm)	INSIDE WIDTH (mm)	OUTSIDE WIDTH (mm)	WEIGHT (kg/m)	WORKING LOAD (kN)	PROOF LOAD (kN)	BREAK LOAD (kN)
	MAX.	MIN.		MAX.					
6	±0.24	18.00	18.50	17.50	7.80	22.20	0.80	11.20	28.30
7	±0.28	21.00	21.80	20.40	9.10	25.90	1.10	15.00	38.60
8	±0.32	24.00	24.70	23.30	10.40	29.60	1.40	20.00	45.20
10	±0.40	30.00	30.90	29.10	13.00	37.00	2.20	31.50	78.50
13	±0.52	39.00	40.20	37.80	16.90	48.10	3.90	55.00	136.00
16	±0.64	48.00	49.40	46.60	20.80	59.20	5.70	80.00	212.00
18	±0.90	54.00	56.40	52.60	23.40	66.40	7.30	100.00	254.00
20	±1.00	60.00	61.80	58.20	26.00	74.00	9.00	125.00	314.00
22	±1.10	66.00	68.00	64.00	28.60	81.40	10.90	150.00	368.00
26	±1.3	92.00	92.30	91.70	33.80	96.20	15.20	212.00	531.00

LIFTING CHAIN (DIN5687-80)

SIZE (mm)	DIAMETER TOLERANCE	PITCH (mm)	PITCH TOLERANCE	INSIDE WIDTH (mm)	WEIGHT (kg/m)	BREAK LOAD (kN)
				MAX.		
6	±0.2	18	±0.5	8.0	0.8	40.22
8	±0.3	24	±0.7	10.8	1.4	60.38
10	±0.4	30	±0.9	13.5	2.2	125.60
13	±0.5	39	±1.2	17.5	3.8	212.26
16	±0.6	48	±1.4	21.5	5.7	321.54
18	±0.9	54	±1.6	24.3	6.9	456.94
20	±1	60	±1.8	27.0	9.0	522.40
22	±1.1	66	±2.0	29.5	10.9	607.90
26	±1.3	92	±2.3	35.0	13.9	849.06
28	±1.4	108	±2.5	37.8	16.5	984.06
32	±1.5	116	±2.8	44.5	22.8	1260



LIFTING CHAIN



LASHING CHAIN



KINDS	SHORT LINK CHAIN	MED LINK CHAIN	LONG LINK CHAIN
DIAMETER (mm)	7 10 13 16 19 20	10 13 16 19 20 26	7 9 11 13 16 19 22
DIAMETER PITCH (mm)	21 30 39 48 57 60	42 52 60 76 86 92	45 55 65 80 100 100 120
INSIDE WIDTH (mm)	10.0 14.0 18.1 22.4 27.8 29.0	15.0 19.5 24.0 28.5 33.0 37.0	10.0 13.0 16.0 20.0 24.0 27.0 33.0
OUTSIDE WIDTH (mm)	25.5 34.0 47.1 57.4 68.8 72.0	37.0 46.5 59.5 69.0 81.5 86.0	26.5 36.0 43.0 51.0 61.0 66.0 84.0
WEIGHT (kg/m)	1.30 2.30 3.80 5.70 8.00 9.00	2.00 3.40 4.04 5.04 7.12 9.40 13.70	0.83 1.80 2.16 2.97 4.44 5.50 8.76
BREAKING LOAD (kN)	61.5 126 212 320 460 510	61.5 212 346 420 460 608 860	61.5 102 162 212 320 460 610

- 100% high tenacity polyester
- Self-extinguishing
- Waterproof
- Length available 1m to 10m
- Working load up to 1400kg (3100lb)
- Single ply or double ply
- Low elongation
- Safety factor available 1.5, 2, 3, 4, 5, 7, 1



吊装带 CARGO LASHING (DOUBLE PLY)

COLOR CODED ACCORDING TO EN1492-1

ITEM NO.	WORKING LOAD LIMIT WITH 1 WEBBING SLING	WORKING LOAD LIMIT WITH 2 WEBBING SLING	STRAIGHT LIFT	CHOKED LIFT	STRAIGHT LIFT	CHOKED LIFT
	STRAIGHT LIFT	CHOKED LIFT	UP TO 45°	UP TO 45°	UP TO 45°	UP TO 45°
WLL1	1,000	0,800	2,000	1,600	1,600	1,200
WLL2	2,000	1,600	4,000	3,200	3,200	2,400
WLL3	3,000	2,400	6,000	4,800	4,800	3,600
WLL4	4,000	3,200	8,000	6,400	6,400	4,800
WLL5	5,000	4,000	10,000	8,000	8,000	6,000
WLL6	6,000	4,800	12,000	9,600	9,600	7,200
WLL7	8,000	6,400	16,000	12,800	12,800	9,600
WLL8	10,000	8,000	20,000	16,000	16,000	12,000

- 100% high tenacity polyester of our design and meet code
- With two ply woven heavy duty of above
- Low elongation
- Each batch is equal to 1 ton capacity
- Effective working length available 1m to 10m
- Safety factor available 1.5, 2, 3, 4, 5, 7, 1
- According to EN 1492-2:2000



吊装带 ROUND SLING

COLOR CODED ACCORDING TO EN1492-1

ITEM NO.	WORKING LOAD LIMIT WITH 1 WEBBING SLING	WORKING LOAD LIMIT WITH 2 WEBBING SLING	STRAIGHT LIFT	CHOKED LIFT	STRAIGHT LIFT	CHOKED LIFT
	STRAIGHT LIFT	CHOKED LIFT	UP TO 45°	UP TO 45°	UP TO 45°	UP TO 45°
WLL1	1,000	0,800	2,000	1,600	1,600	1,200
WLL2	2,000	1,600	4,000	3,200	3,200	2,400
WLL3	3,000	2,400	6,000	4,800	4,800	3,600
WLL4	4,000	3,200	8,000	6,400	6,400	4,800
WLL5	5,000	4,000	10,000	8,000	8,000	6,000
WLL6	6,000	4,800	12,000	9,600	9,600	7,200
WLL7	8,000	6,400	16,000	12,800	12,800	9,600
WLL8	10,000	8,000	20,000	16,000	16,000	12,000
WLL9	12,000	9,600	24,000	19,200	19,200	14,400

吊装带 CARGO LASHING

SG7101
SIZE: 2"X6"/10MM
Webbing: 50mm
Breaking load: 3000kg/5000kg
with double J type hook

SG7101



SG7104
SIZE: 3"X6"/12MM
Webbing: 75mm
Breaking load: 1000kg
Batcher tie down with flat hook

SG7104



SG7102
SIZE: 2"X6"/10MM
Webbing: 50mm
Breaking load: 3000kg/5000kg
with double J type hook

SG7102



SG7103
SIZE: 2"X6"/10/12MM
Webbing: 50mm
with double J type hook
Breaking load: 3000kg/5000kg

SG7103




DRUM LIFTER




CARE and USE

- DRUM LIFTER is for some application as Crane, Ditcher Hoist, and Chain Block.
- DRUM LIFTER has various application for lifting of large or normal steel drums, without lid, or even for Liquid or Solid, the different shaped or Irregular steel boxes.
- As general usage, there is an example to use steel drum to Cut half or octagonal saw to use, and in such case of no edge (portion of drum) appearing on grip section. There is no for DRUMS to dip or corner lift. But in this Case, grip edges would be welded or bolted reinforcements as shown Under.
- In any case, Do not exceed Working Load Limit.
- Upright lifting would be applicable by one hand operation if spring will be left.

PACKING



How to use



SPECIFICATIONS

Type	Working Load Limit	Proof Test Load
Single	1000 kgs	2000 kgs
Double	2000 kgs	4000 lbs
DB-1	1100 lbs	2200 lbs

WEIGHTS (Gross)

Type	1 PC/carton	(2x1/2) PC/carton
DB-1	3.6 kgs	22 kgs
	8 lbs	49 lbs

Dimensions & Weights are approximate.

DIMENSIONS

CHAIN		MASTER LINK		REACH	
Diameter	Length	Dia.	Inside Width	Inside Length	
6.3mm	51mm	13mm	66mm	93mm	600mm
1/4"	20-1/2"	1/2"	2-3/8"	3-2/3"	27-1/8"

CABLE SOCKS




TG CABLE SOCKS

MODE	SIZE RANGE	E (mm)	M (mm)	Max. Working Load (kg)	N.W. (kg)
TG-080-24	13-14	203	833	3000	0.365
TG-080-24	16-18	203	610	3000	0.24
TG-080-24	19-25	229	610	3000	0.365
TG-080-24	26-38	229	610	4300	0.52
TG-080-24	38-51	279	610	7400	1.105
TG-080-24	51-63	335	610	8300	
TG-080-24	63-76	335	610	11000	1.35
TG-080-24	76-89	356	610	11000	
TG-080-24	89-102	356	660A	11000	2.12

RII CABLE SOCKS

SIZE RANGE (mm)	M (mm)	N (mm)	P (mm)	Rated Load (kg)	Approx. Breaking Strength (kg)	N.W. (kg)
13-17	260	233	353	400	800	0.032
17-23	260	290	400	600	1200	0.060
23-31	325	290	442	800	1600	0.096
31-40	400	286	520	1400	800	0.13

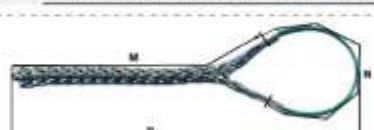

RII CABLE SOCKS

SIZE RANGE (mm)	M (mm)	N (mm)	P (mm)	Rated Load (kg)	Max. Working Load (kg)	N.W. (kg)
15-25	640	255	730	450	1350	0.170
25-40	745	280	865	500	1500	0.260
35-45	740	280	870	625	1875	0.290
35-50	770	253	890	625	1875	0.340
45-60	830	280	940	850	2550	0.50
60-65	815	295	965	850	2550	0.66
60-65	850	285	975	950	2850	0.66
80-100	880	310	1020	1150	3450	0.75

For project ideas and tips
www.seagullhoist.com

链条拉紧器 CHAIN BINDER



S.W.L. (kg)	T.L. (kg)	N.W. (kg)	DIA. OF CHAIN (mm)
1000	1500	5.5	60

双抱扣 CONNECTING LINK



SIZE	FOR ROPE DIA.
1/4"	9
5/16"	9
3/8"	10
1/2"	12-14
5/8"	16
3/4"	20
7/8"	23
1"	25

BY 夹板轮 STEEL PULLEY



SIZE	S.W.L. (kg)	N.W. (kg)	DIA. OF CHAIN (mm)
4	3400	3.4	8.9

SK 滑车 BLOCK



SIZE	S.W.L. (kg)	FOR WIRE DIA.	N.W. (kg)
6	5	16-20	1.3
8	7.5	20-25	15.5

BYO 夹板轮 STEEL PULLEY



SIZE (mm)	S.W.L. (kg)	N.W. (kg)	FOR WIRE DIA. (mm)
5	5000	5.5	13-15

油桶吊钩 BARREL HOOKS



S.W.L.	φ (mm)	L (mm)	T (mm)
1	φ40	125	12.5
2	φ40	135	15

For project ideas and tips
www.seagullhoist.com